

### LENNTech

info@lenntech.com Tel. +31-152-610-900  
www.lenntech.com Fax. +31-152-616-289

#### Overview

A uniquely designed crossflow tower built specifically for expanding markets.

#### Primary Benefits

- Marley's patented Spiral Target Nozzles minimize clogging and maximize performance
- Integral Louvers and eliminators that allow no more than 0.005% drift
- Fiberglass, corrosive-resistant design
- Meets the China GB-17888 code standard of safety



Marley MX Film Fill

#### Maximum performance with Marley's Spiral Target Nozzles

- Engineered for ideal water distribution
- Easily accessible nozzle orifice for reduced clogging and maintenance
- Single assembly with no moving parts
- Optimal nozzle size for the specific design water flow rate



#### Benefit Detail

##### High Efficiency MX Film-Fill

- Angled heat transfer surface for maximum thermal performance
- Patented triple pass eliminators allows for high water and air flow rates while maintaining minimal drift rates
- Integral louvers reduce pressure drop and prevent icing during winter conditions and splash out in summer conditions



Marley Spiral Target Crossflow Nozzle



## Benefit Detail (continued)

### Safer tower inspection

- Mechanical equipment accessible from plenum walkway
- Plenum walkway uses a Marley designed surface with a slip resistant platform
- Minimizes need to access the fan deck of the tower


### Capacity Range

- 14 models ranging from 121 to 379 tons per cell at 95°/85°/78°F
- Flow rates from 82 m³/hr to 258 m³/hr per cell

### Features

- Thermal performance is certified by GB/T 7190.1-2008
- Tested structural design that minimizes vibration
- Low sound fan
- Corrosion-resistant fiberglass construction
- Max-efficiency crossflow film-fill
- Large access door
- Field assembled design simplifies transportation to job sites

## Additional Options

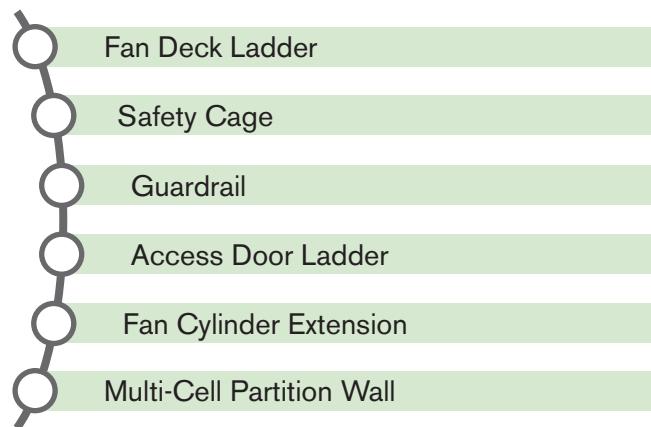

## Number of Models Meeting China Design Standard

