



Technical data Corode magnetic drive pumps

LENNTECH
WATER TREATMENT Solutions


CORODE
PUMPS & FILTERS

CPMD-11 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:11m ³ /h
Max. head	:11.8mtr.
Max. temperature	:PP 75°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:0.55kW, 400V, 2.3/1.3Amp, 3Ph, 50Hz, IP55 :0.55kW, 230V, 5Amp, 1Ph, 50Hz, IP55 <i>Other voltage options and 60Hz available on request.</i>

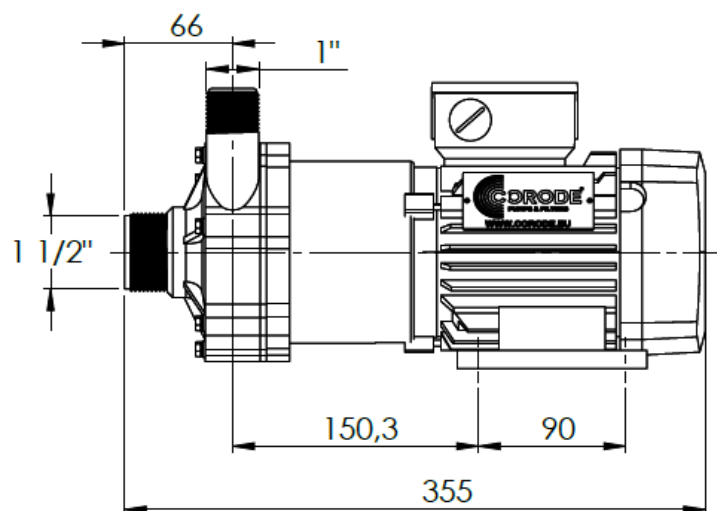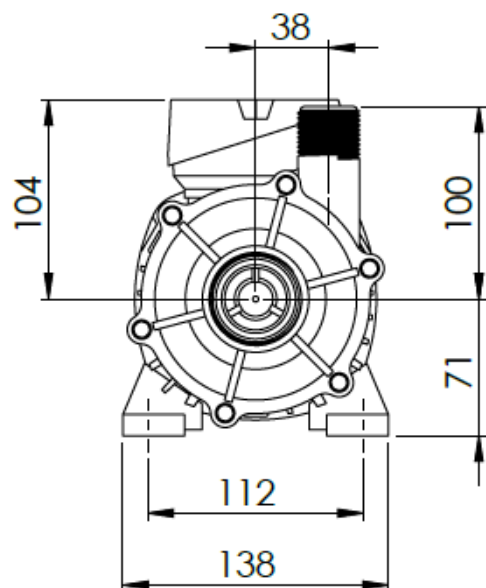

CPMD-11

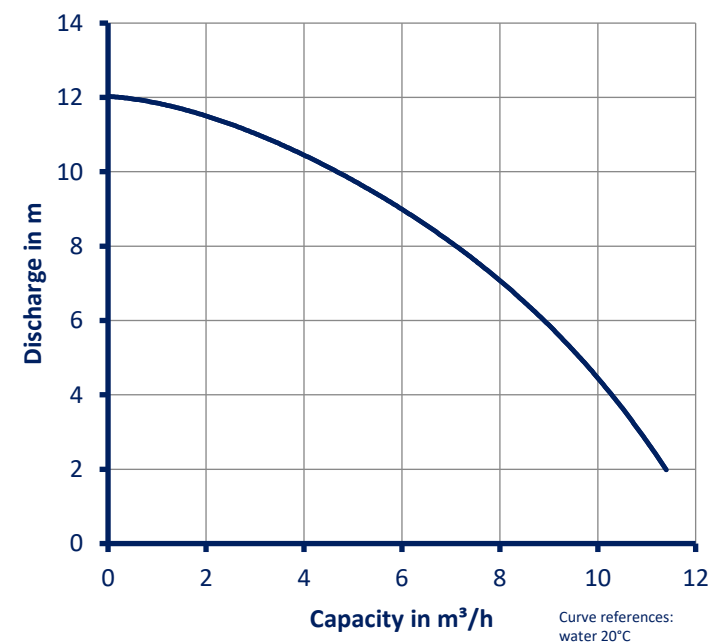

LENNTECH
WATER TREATMENT Solutions

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289