

Technical data Corode magnetic drive pumps

LENNTECH
WATER TREATMENT SOLUTIONS



CORODE
PUMPS & FILTERS

CPMD-20 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:20.8m ³ /h
Max. head	:18.2mtr.
Max. temperature	:PP 75°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:1.5kW, 400V, 5.42/3.15Amp, 3Ph, 50Hz, IP55 <i>Other voltage options and 60Hz available on request.</i>



CPMD-20

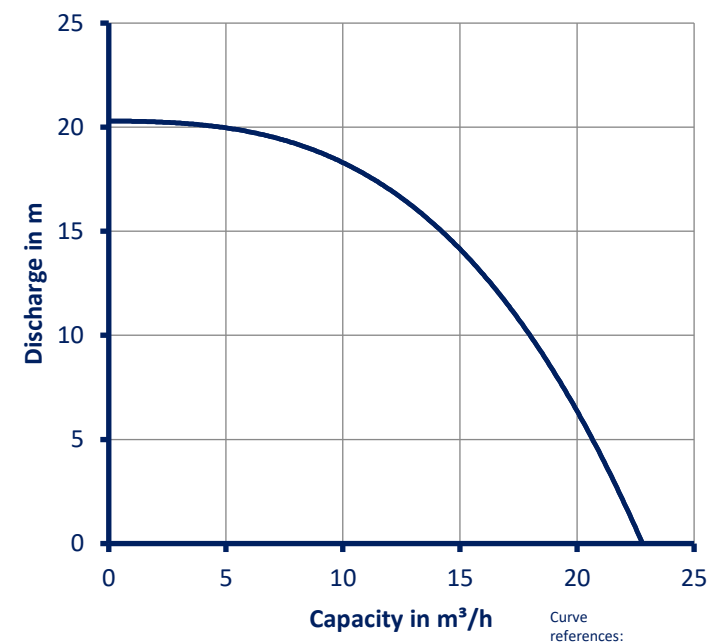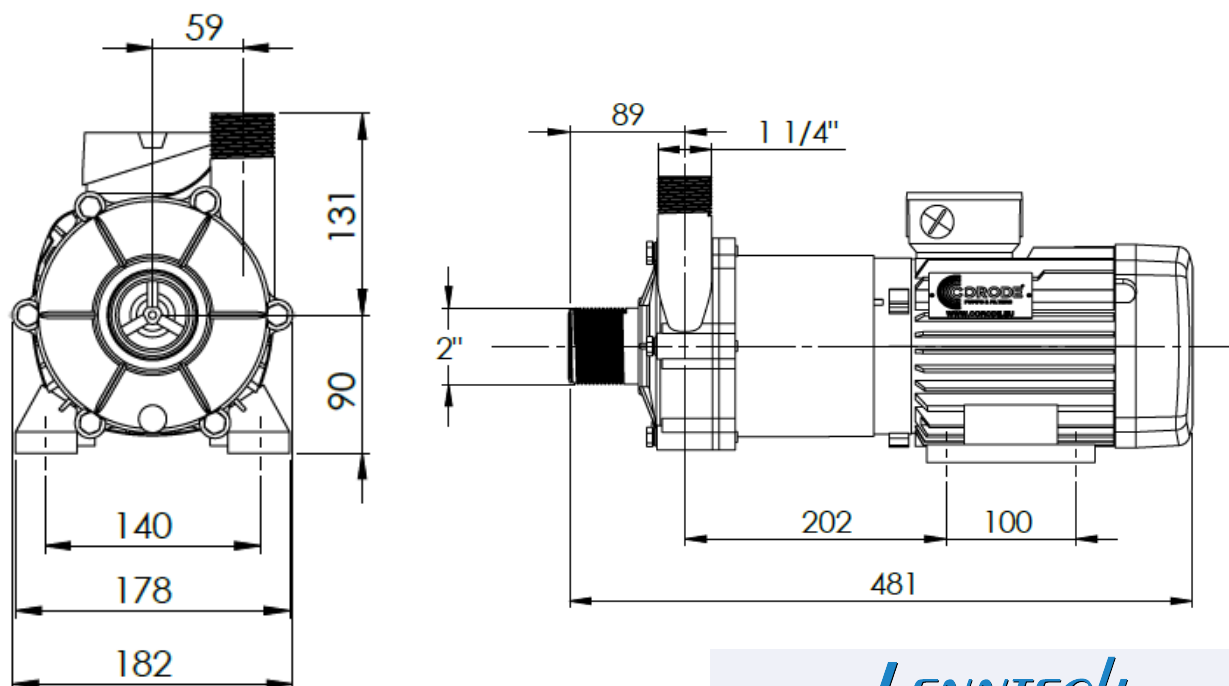

LENNTECH
WATER TREATMENT SOLUTIONS
info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289