


MAG-04 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:3,5m ³ /h
Max. head	:7mtr.
Max. temperature	:PP 60°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:0.12kW, 400V, 0.66/0.38Amp, 3Ph, 50Hz, IP55 :0.12kW, 230V, 1.1Amp, 1Ph, 50Hz, IP55



	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-30	1" in	1/2" out	288	152	120	90	110	72	93	39	60	160	34

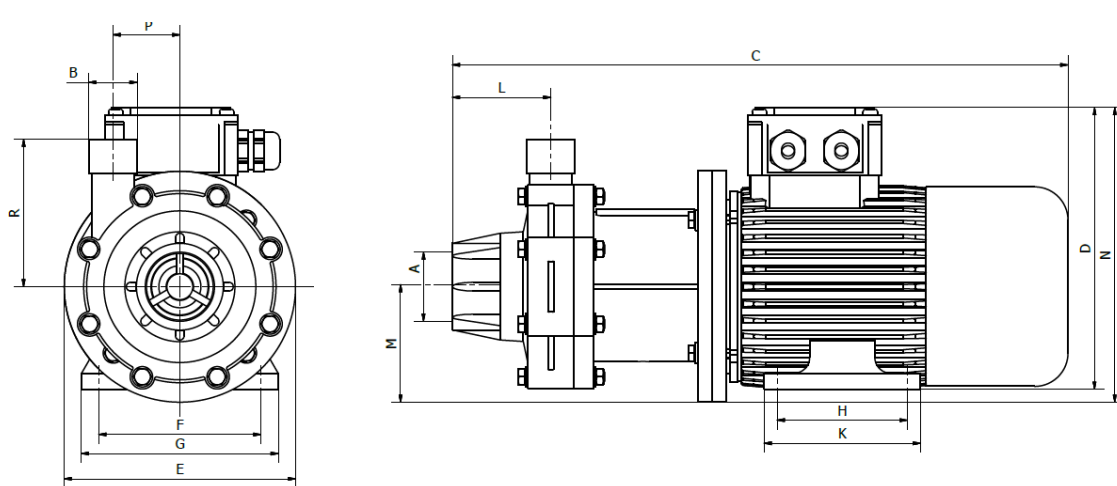