


MAG-07 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:6,5m ³ /h
Max. head	:8.5mtr.
Max. temperature	:PP 60°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:0.25kW, 400V, 1.23/0.71Amp, 3Ph, 50Hz, IP55 :0.25kW, 230V, 2.2Amp, 1Ph, 50Hz, IP55



	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-07	1" in	3/4" out	340	167	140	100	124	80	100	59	70	175	45

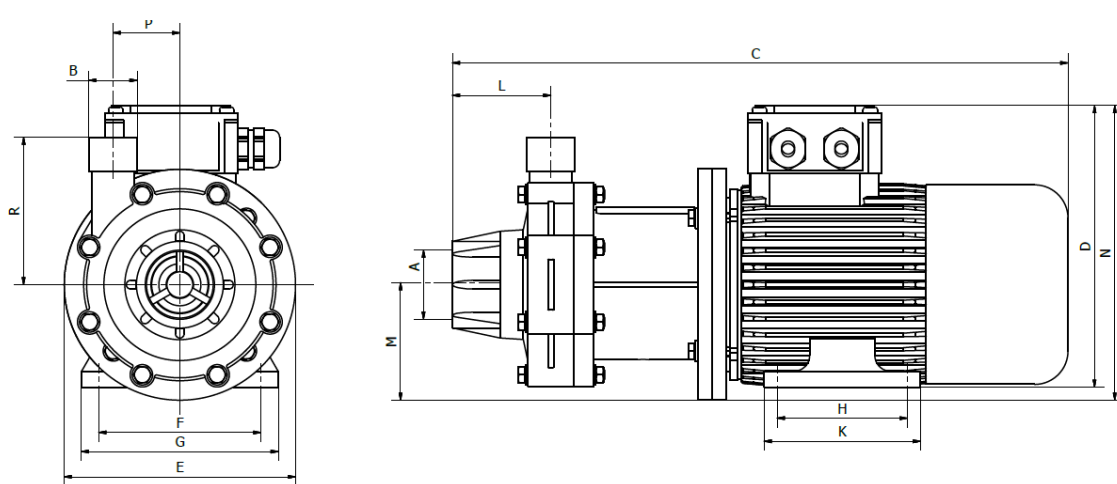