


Technical data Corode magnetic drive pumps

LENNTECH
WATER TREATMENT Solutions


CORODE
PUMPS & FILTERS

MAG-10 PP/ PVDF

Materials available :PP or PVDF
O-ring :EPDM or Viton
Max. flow :12m³/h
Max. head :13.2mtr.
Max. temperature :PP 60°C; PVDF 90°C
Max. viscosity :200 cSt
Motor : 0.55kW, 400V, 2.29/1.32Amp, 3Ph, 50Hz,
IP55 :0.55kW, 230V, 5Amp, 1Ph, 50Hz, IP55

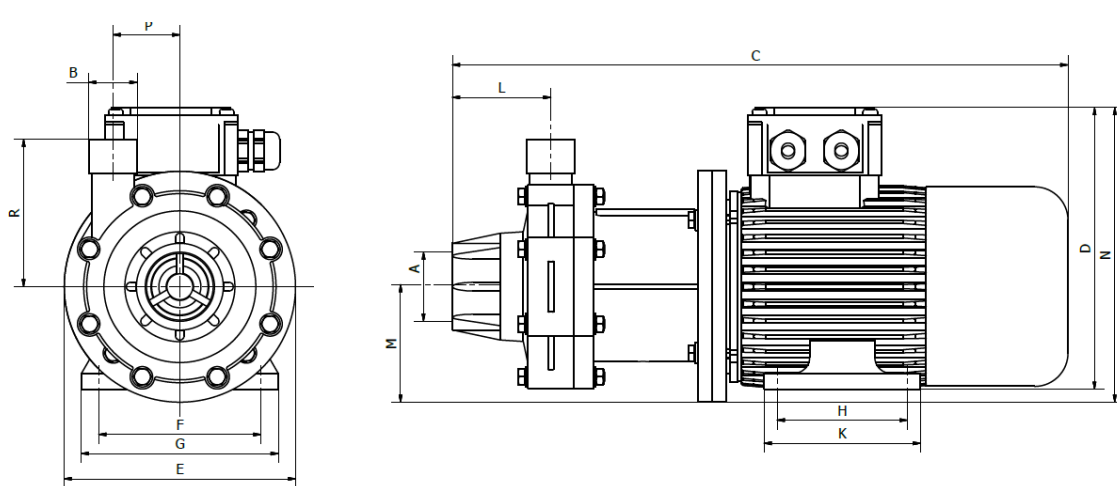

	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-10	11/2" in	1" out	393	183	160	115	144	90	108	70	80	195	45

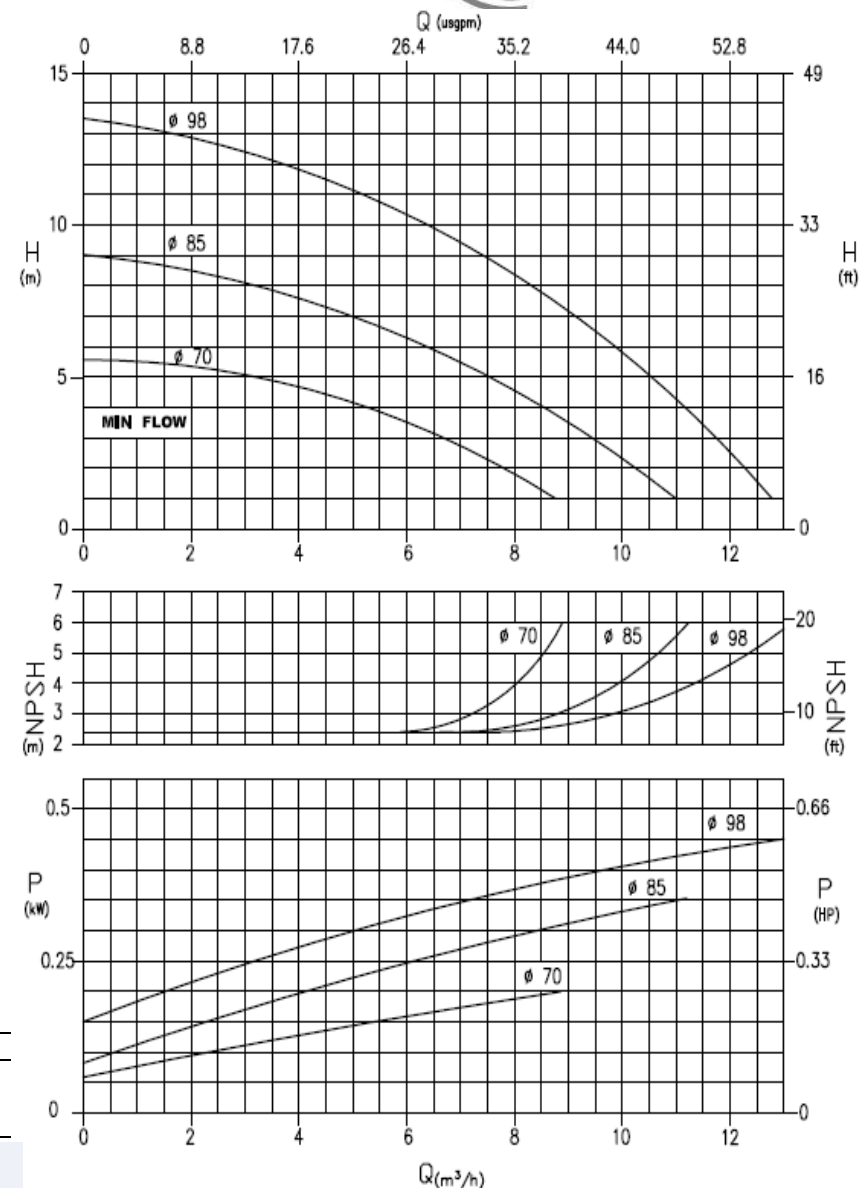

LENNTECH
WATER TREATMENT Solutions

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289