


MAG-30 PP/ PVDF

Materials available	:PP or PVDF
O-ring	:EPDM or Viton
Max. flow	:35m ³ /h
Max. head	:24mtr.
Max. temperature	:PP 60°C; PVDF 90°C
Max. viscosity	:200 cSt
Motor	:2.2kW, 400V, 7.6/4.4Amp, 3Ph, 50Hz, IP55



	A	B	C	D	E	F	G	H	K	L	M	N	P
MAG-30	21/2"out	2"out	560	245	200	140	180	125	165	91	100	240	66

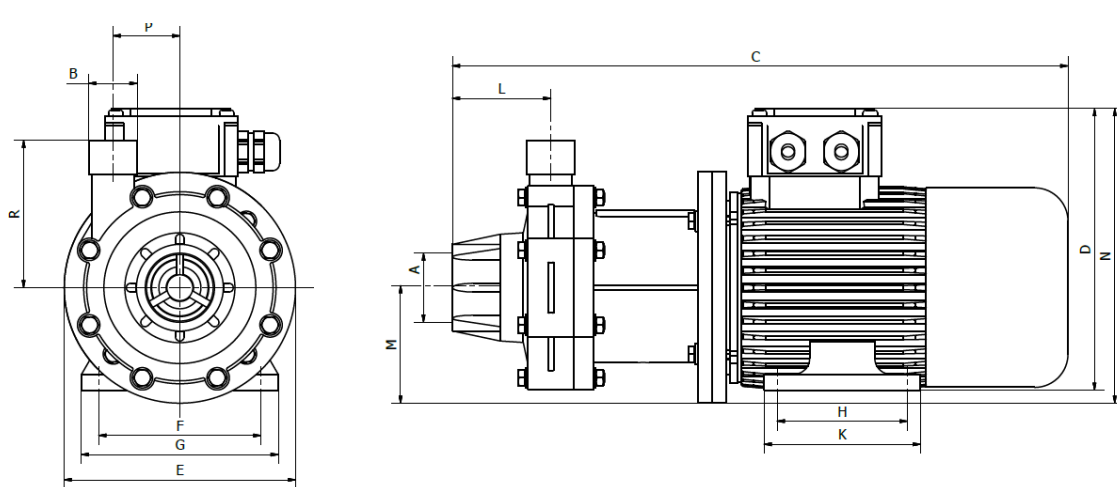