


Ixo N – Submersible Borehole Pump

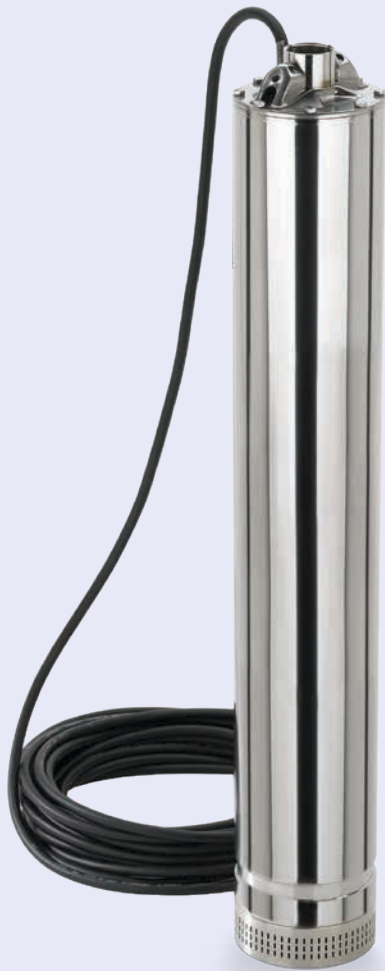

Applications:

- Water supply systems
- Spray irrigation systems
- Washing plants
- Rainwater harvesting
- Water extraction

More information:

www.ksb.com/products

Ixo N – Submersible Borehole Pump

Straightforward installation

- Supplied completely wired, with mains cable and plug (single-phase version)
- Integrated capacitor (single-phase version)

Corrosion resistance / wear resistance

All wetted components made of AISI 304 stainless steel

Maintenance-free

Motor bearing lubricated for life

High operating reliability


- Double shaft seal with oil reservoir fitted in between (additional dry running protection)
- Cylindrical suction strainer prevents ingress of solid matter and serves as a support foot for installing the pump in tanks with a level floor.

Flexibility

Partly submerged operation possible: hydraulic system at the bottom and motor on top are cooled by the fluid handled.



Ixo N characteristic curves

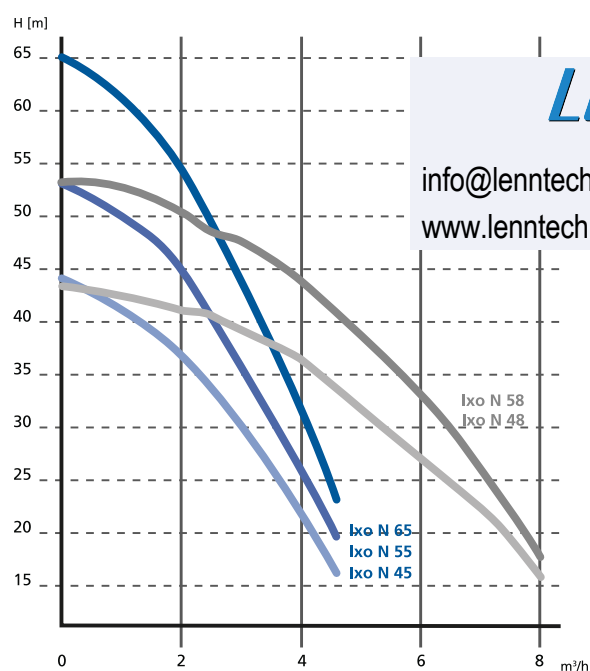

LENNTECH
WATER TREATMENT SOLUTIONS

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

	Stainless steel
Impeller	Stainless steel
Shaft	Stainless steel
Mechanical seal, motor end	Staeite, carbon, NBR,
Mechanical seal, pump end	Aluminium oxide, carbon, NBR
Lubricating oil	White oil (food and pharmaceuticals approved)

Technical data

Flow rate	Up to 8 m³/h, 133 l/min
Head	Up to 65 m
Fluid temperature	Up to +35 °C