

High-pressure Pump

Multitec / Multitec-RO

High-pressure Ring-section Pump

Type Series Booklet



Legal information/Copyright

Type Series Booklet Multitec / Multitec-RO

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB Aktiengesellschaft, Frankenthal 13.10.2015


Contents

High-pressure Pumps	4
High-pressure Centrifugal Pump	4
Multitec/Multitec-RO	4
Main applications	4
Fluids handled	4
Operating data	4
Designation	4
Design details	4
Materials	5
Technical description	6
Operating ranges by installation type	8
Product benefits	9
FluidFuture energy efficiency concept developed by KSB	9
Acceptance tests / Guarantees	9
Pressure and temperature limits	10
Material variants	12
Seal codes for the mechanical seal	16
Seal codes for the gland packing	17
Technical data	18
Noise characteristics	18
Selection charts	20
Drive	23
Dimensions	24
Flange design (standard)	31
Nozzle positions	32
General assembly drawing with list of components (example)	33

High-pressure Pumps

High-pressure Centrifugal Pump

Multitec/Multitec-RO

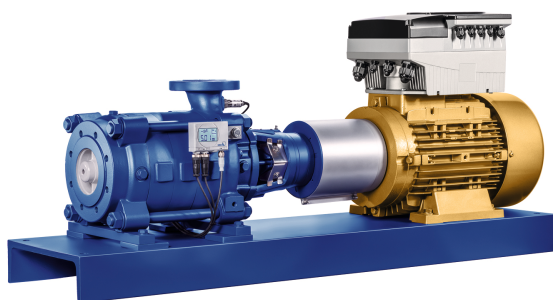

- Feed water
- Hot water
- Condensate
- Fire-fighting water
- Solvents
- Lubricants
- Fuels
- Cooling water
- Water/oil emulsions
- Seawater
- Thermal water

Operating data

Operating data

Characteristic		Value
Sizes	DN	32 - 200
Flow rates	Q [m³/h]	≤ 850
	Q [l/s]	≤ 236
Heads	H [m]	≤ 630, (1000 ¹⁾)
Fluid temperature	T [°C]	-10 to +200
Operating pressures	p ₂ [bar] ²⁾	≤ 63, (100 ¹⁾)

Designation

Example: Multitec³⁾ A 32/8E-2.1 12.65 (SP)

Key to the designation

Code	Description
Multitec	Type series
A	Installation type
32	Nominal discharge nozzle diameter [mm]
8E	No. of stages / impeller combination
2.1	Hydraulic system
12	Material code
65	Seal code
SP	Code for special variants (optional)

Example: Multitec-RO⁴⁾ A 100/5-8.1 31.80

Key to the designation

Code	Description
Multitec-RO	Type series
A	Installation type
100	Nominal discharge nozzle diameter [mm]
5	Number of stages
8.1	Hydraulic system
31	Casing material (duplex stainless steel)
80	Seal code

Main applications

- Water supply
- Drinking water supply
- Pressure boosting
- General irrigation systems
- Fossil-fuelled power stations
- Hot-water supply
- Condensate transport
- Boiler feed applications
- Heating systems
- Filtering systems
- Fire-fighting systems
- Snow-making systems
- Washing plants
- Industrial plants
- Desalination plants
- Geothermal plants
- Heat recovery systems

Fluids handled

- Water
- Drinking water

Design details

Design

- Multistage centrifugal pump in ring-section design
- Horizontal installation in long-coupled or close-coupled design

¹⁾ Only for individual sizes/designs

²⁾ The sum of inlet pressure and shut-off head must not exceed the value indicated.

³⁾ Code: MTC

⁴⁾ Code: MTC-RO

- Vertical installation in close-coupled design or with cardan shaft

Pump casing

- Suction casing: axial or radial
- Radial suction casing and discharge casing: nozzles can be turned in steps of 90°
- Flanges to EN and ASME (holes and flange facing)
- Identical seal housing for gland packing and mechanical seal (separate component)
- Stage casings, discharge casings and seal housing sealed by confined O-rings

Drive

- 50 Hz and 60 Hz electric motor
- Can be driven by diesel engine or turbine

Impeller type

- Closed radial impeller with multiply curved vanes

Bearings

- Fixed bearing, drive end: rolling element bearing
- Radial bearing, non-drive end: either plain bearing or rolling element bearing, depending on the type of installation
- Lubrication:
 - Rolling element bearing grease or oil lubricated

- Plain bearing lubricated by fluid handled

- Self-aligning

Coupling

- Long-coupled designs: flexible coupling with or without spacer
- Close-coupled design up to DN 65 with rigid coupling, larger designs with flexible coupling without spacer

Coupling guard

- Standard coupling guard, cylindrical
- Optional: tread-proof coupling guard

Shaft seal





- Uncooled gland packing, with or without barrier fluid
- Standardised mechanical seal to EN 12756, cooled or uncooled, single or double
- Cartridge seal

Materials

- Casing: grey cast iron, nodular cast iron, steel, stainless steel, duplex stainless steel, super duplex stainless steel
- Hydraulic system: grey cast iron, bronze, stainless steel, duplex stainless steel, super duplex stainless steel

Technical description

Designs A, B, C and D

Installation type	A ⁵⁾	B ⁵⁾	C ⁵⁾	D ⁶⁾
	 - Horizontal design, baseplate mounted - Only one shaft passage (drive end) - Rolling element bearing at the drive end / plain bearing on the suction side - Axial suction nozzle (block flange up to size 50) - Drive on discharge side	 - Horizontal design, baseplate mounted - Only one shaft passage (drive end) - Rolling element bearing at the drive end / plain bearing on the suction side - Radial suction nozzle - Drive on discharge side	 - Horizontal design, baseplate mounted - With two shaft passages - Rolling element bearings at the drive end and on the suction side - Drive on discharge side	 - Horizontal design, baseplate mounted - With two shaft passages - Rolling element bearings at the drive end and on the discharge side - Drive on suction side
H/Q range:	Complete range	Complete range	Complete range	Complete range
	Multitec-RO: Design A only		DN 200: For installation types C and D only	
Drive	Electric motor, diesel engine, turbine			
Axial thrust balancing	By balance drum ⁷⁾			
Q _{max} ⁸⁾	850 m³/h			
H _{max}	630 m (1000 m ⁹⁾)			
p _{2 max}	63 bar (100 bar ⁹⁾)			
t _{max}	-10 °C to +200 °C, Multitec-RO up to 45 °C			
Shaft seal	Uncooled gland packing, cooled or uncooled mechanical seal; single or double cartridge seal			
Material	Casing: - Grey cast iron, steel, stainless steel for Multitec - Duplex and super duplex stainless steel for Multitec-RO Hydraulic system: - Grey cast iron, bronze, stainless steel for Multitec - Duplex and super duplex stainless steel for Multitec-RO		Casing: grey cast iron, nodular cast iron ¹⁰⁾ , steel, stainless steel Hydraulic system: grey cast iron, bronze, steel, stainless steel	

⁵⁾ The direction of rotation is clockwise, seen from the motor end.

⁶⁾ The direction of rotation is counter-clockwise, seen from the motor end.




⁷⁾ For small numbers of stages without balance drum the axial thrust is completely absorbed by the thrust bearing.

⁸⁾ Note: The indicated Q values apply to 50 Hz; for 60 Hz values refer to the individual characteristic curves.

⁹⁾ Only for individual sizes/designs


¹⁰⁾ Only for DN 200

Designs E, F and V

Installation type	E ⁵⁾	F ⁵⁾	V ⁵⁾	
				
	- Horizontal close-coupled pump - Common bearing for pump and motor - Rigid coupling - Radial suction nozzle - Plain bearing at the suction side	- Horizontal close-coupled pump - Common bearing for pump and motor - Rigid coupling - Axial suction nozzle - Plain bearing at the suction side	Vertical close-coupled pump	
H/Q range: ⁸⁾	100 m ³ /h, 250 m, up to nominal diameter 65	100 m ³ /h, 250 m, up to nominal diameter 65	Up to 200 kW	
Drive	Standardised motor		Standardised motor, fixed bearing at the drive end ¹¹⁾	Standardised motor
Fixed bearing	Motor ¹¹⁾		Motor ¹¹⁾ : DN 32, DN 50, DN 65	In lantern: DN 100, DN125, DN 150
Axial thrust balancing	By balance drum		By balance drum	By balance drum
Q _{max} ⁸⁾	100 m ³ /h		400 m ³ /h	
H _{max}	250 m		630 m	
p _{2 max}	40 bar		63 bar	
t _{max}	-10 °C to +140 °C		-10 °C to +140 °C	
Shaft seal	Uncooled gland packing, uncooled mechanical seal, single		Uncooled gland packing, uncooled mechanical seal, single	
Material	Casing: grey cast iron Hydraulic system: grey cast iron, bronze		Casing: grey cast iron, steel, stainless steel Hydraulic system: grey cast iron, bronze, stainless steel	

¹¹⁾ For Multitec 32, Multitec 50 and Multitec 65 the motor bearings on the coupling side are fixed bearings

Operating ranges by installation type

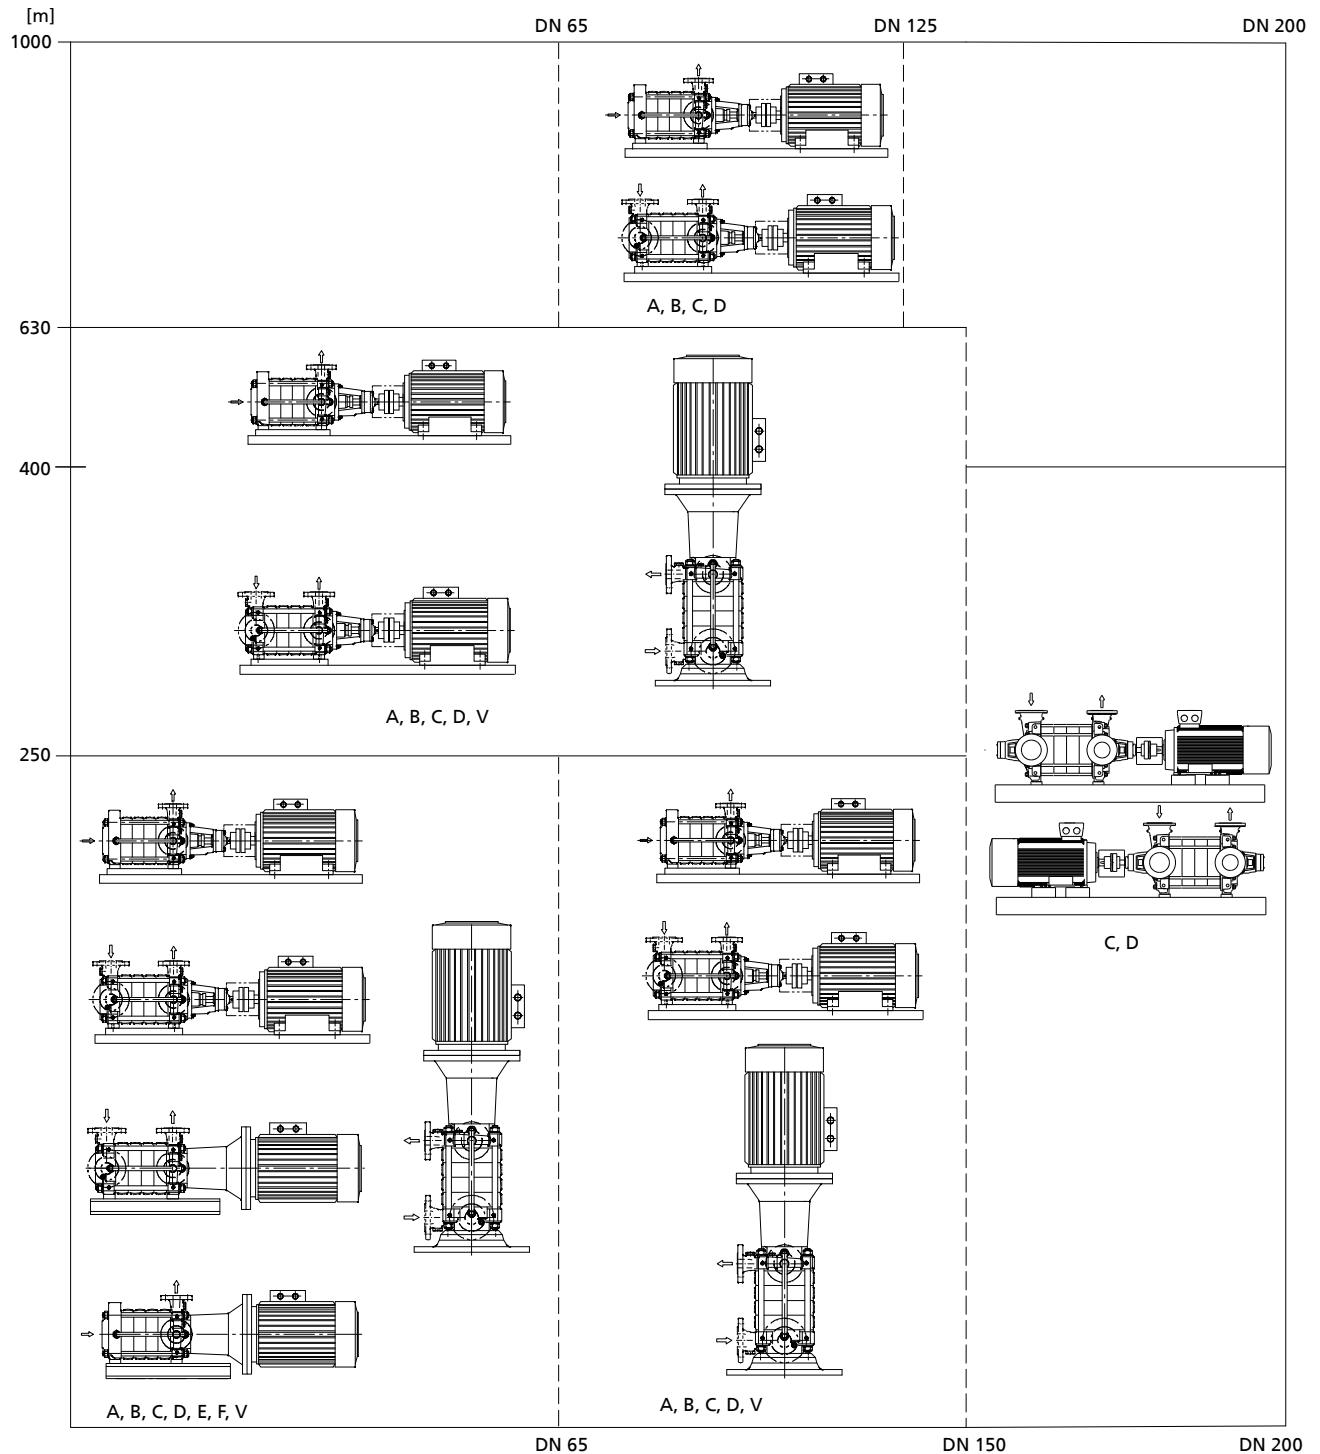

Operating ranges by installation type

Product benefits

- Space-saving compact design with axial inlet and product-lubricated plain bearing
- Flexible, best matching adaptation to system condition by variety of installation types and variable nozzle position
- Low NPSH value, improved suction behaviour and operating reliability for suction lift operation by special suction impeller
- Optimised efficiencies and reduced operating costs by newly developed hydraulic system
- Versatile use by broad range of installation types, materials and shaft seals
- Optimum selection for fluid to be pumped and operating conditions by large choice of materials
- High resistance by casing wear rings / closing discs made of corrosion-resistant material, economical and easy to replace
- Shaft protected from wear by shaft protecting sleeve made of stainless steel
- Axial thrust balancing by balance drum
 - Low bearing load at changing operating condition
 - Long life of rolling element bearings and shaft seals
 - Use of standardised seals due to lower pressure in the shaft seal chamber
- Longer service life, higher operating reliability, lower operating costs, maintenance costs and investment costs by maintenance-free, robust plain bearing made of silicon carbide, also suitable for operation with frequent starts/stops.
- Service-friendly by bearing assembly and mechanical seal being easy to dismantle

FluidFuture energy efficiency concept developed by KSB



<http://www.ksb.com/fluidfuture>


Acceptance tests / Guarantees

Certificates / inspections/ acceptance tests on request:

- Test reports 2.2 to EN 10204 for pressure-retaining components, shaft and impellers
- Hydrostatic pressure test of pressure-retaining components
- Balancing test
- Hydraulic tests:
 - Performance test to ISO 9906 or Hydraulic Institute
 - NPSH test
 - Vibration test
 - Bearing temperature measurement
- Strip test
- Dimensional inspection
- Coating inspection
- Final inspection and testing


Pressure and temperature limits

Material JL1040 (GJL-250), EN-GJS 400-15¹²⁾

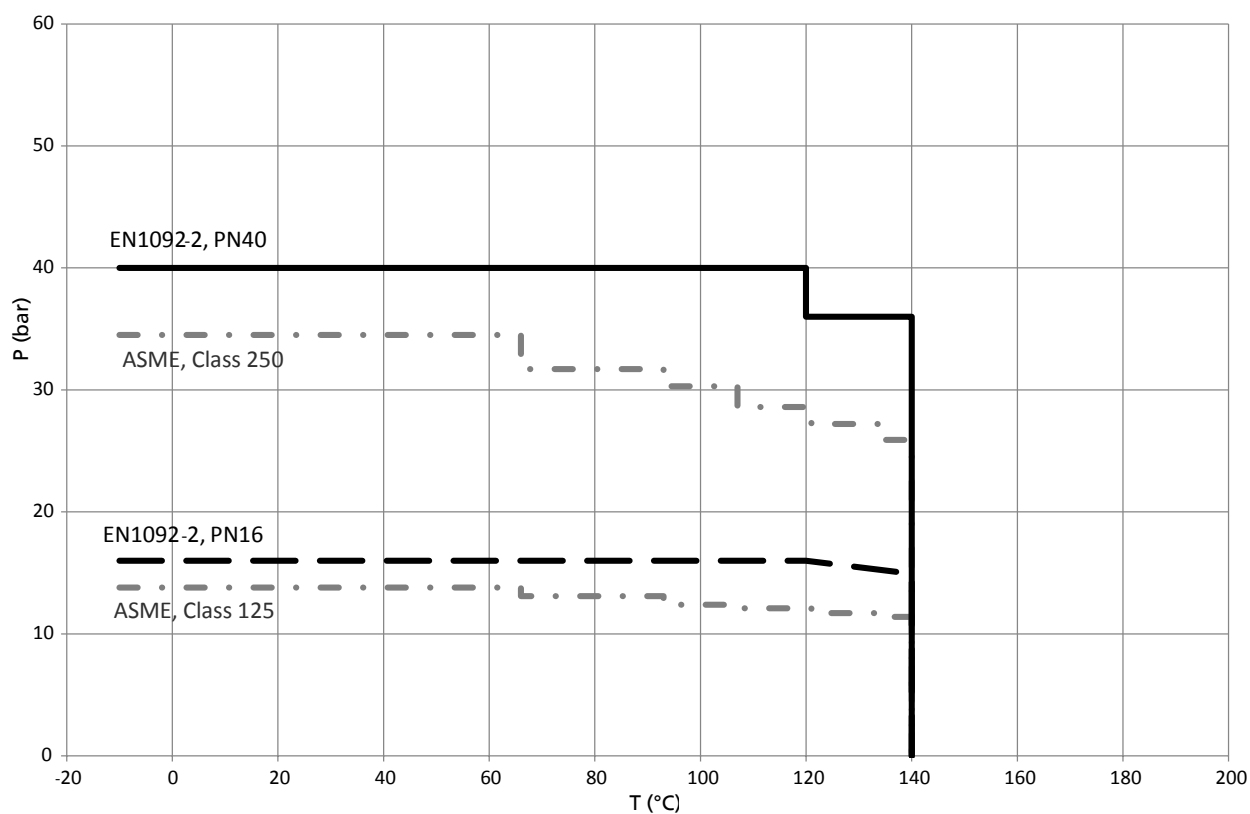


¹²⁾ Only for fluid temperatures up to 60 °C


Material GP240GH+N (1.0619+N)

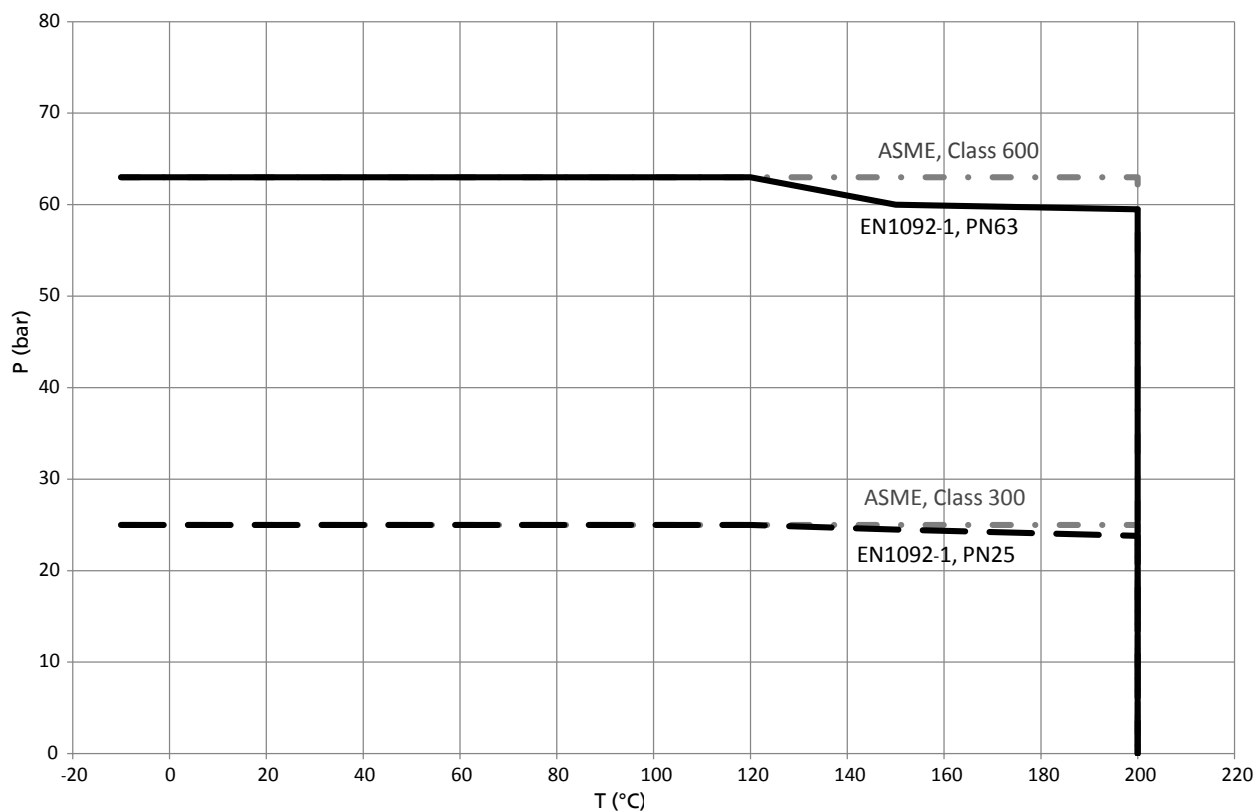

Material 1.4408

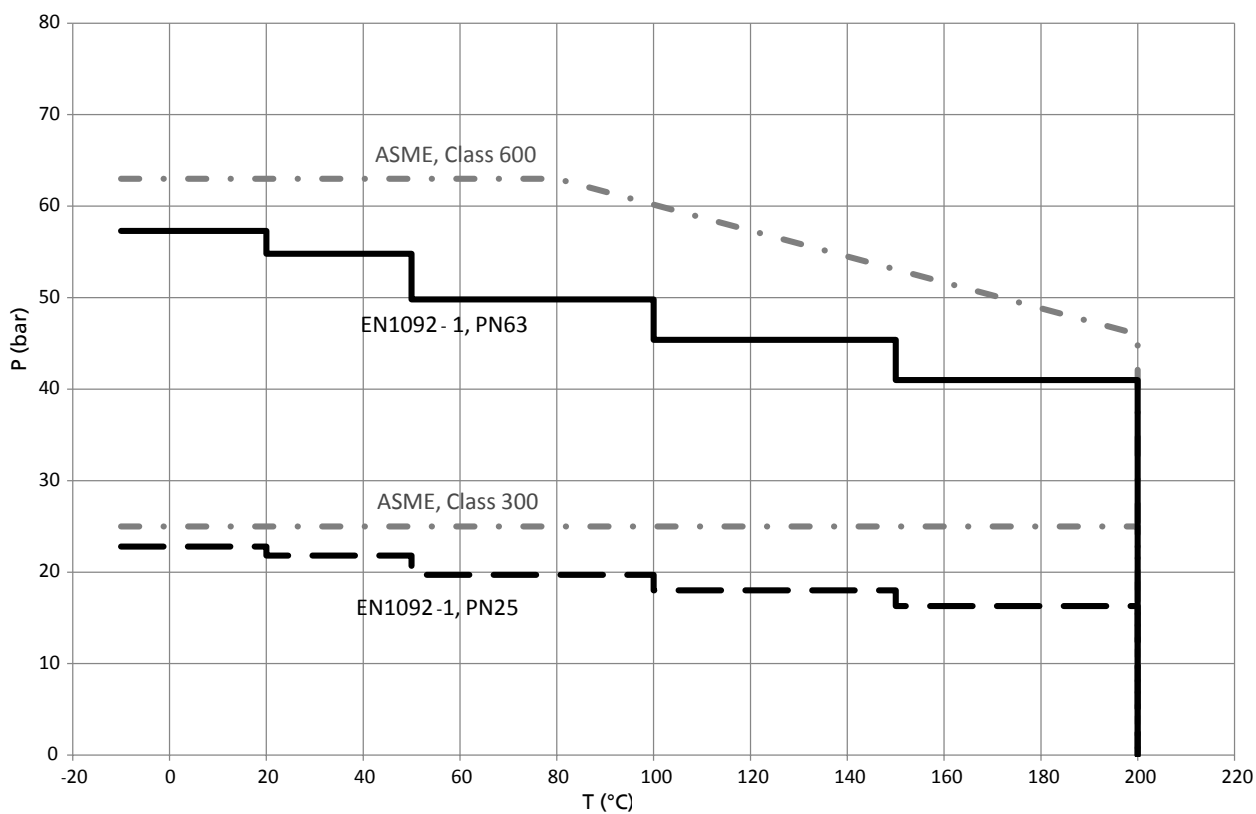

Material 1.4317, 1.4517, 1.4469

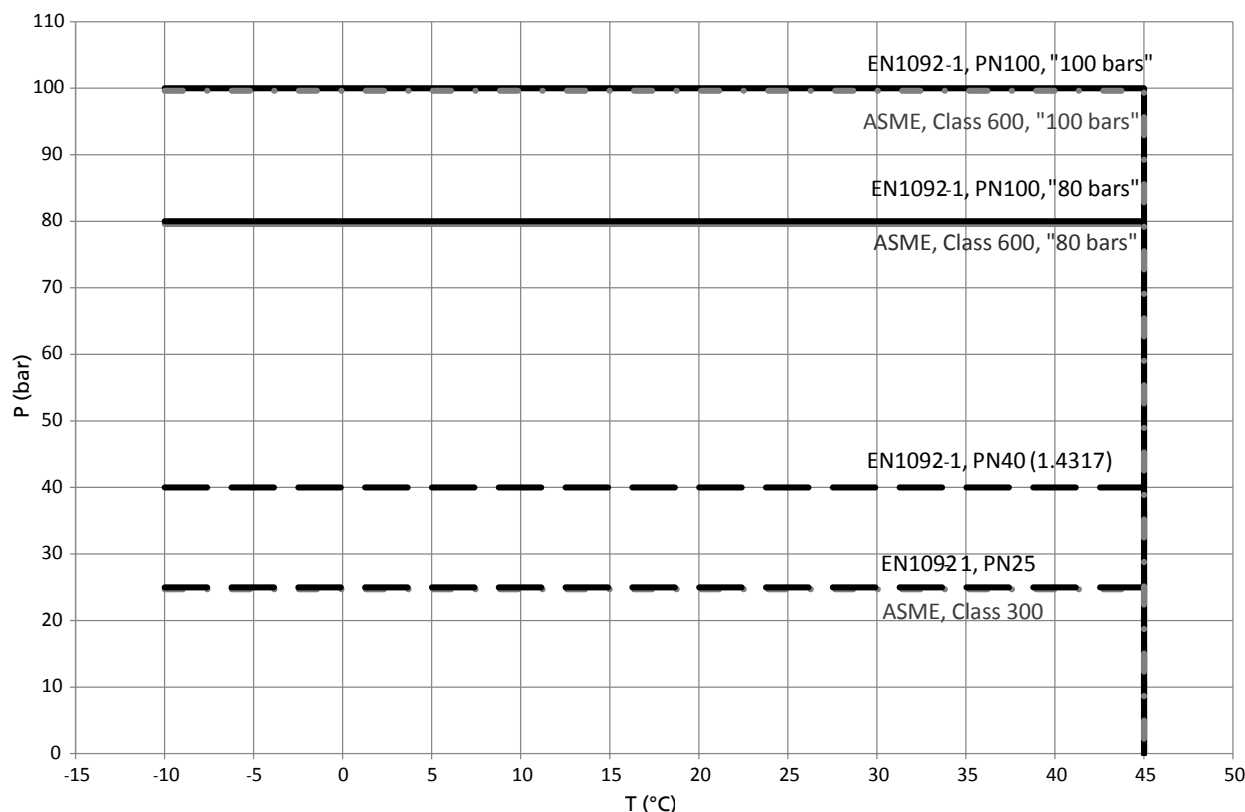

Material variants

Material codes for versions with cast steel casing

Part No.	Part description	Material code				
		10 ¹³⁾	11 ¹³⁾¹⁴⁾	12 ¹³⁾¹⁴⁾	13 ¹³⁾	14 ¹³⁾
106	Suction casing	GJL-250	GJL-250 ¹⁵⁾ / GJS-400-15 ²³⁾	GJL-250 ¹⁵⁾ / GJS-400-15 ²³⁾	GJL-250	GJL-250
107	Discharge casing	GJL-250	GJL-250 ¹⁵⁾ / GJS-400-15 ²³⁾	GJL-250 ¹⁵⁾ / GJS-400-15 ²³⁾	GJL-250	GJL-250
108	Stage casing	GJL-250	GJL-250 ¹⁵⁾ / GJS-400-15 ²³⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GJL-250 ¹⁷⁾ / GJS-400-15 ²³⁾	GJL-250	GJL-250
171	Diffuser	GJL-250 ¹⁸⁾	GJL-250 ¹⁸⁾	CC480K-GS	GJL-250 ¹⁸⁾	GJL-250 ¹⁸⁾
210	Shaft	C45+N ¹⁹⁾	C45+N ¹⁹⁾ / 1.4021+QT ¹⁹⁾	C45+N ¹⁹⁾ / 1.4021+QT ¹⁹⁾	C45+N ¹⁹⁾	C45+N ¹⁹⁾ 20)
230	Impeller	GJL-250	CC480K-GS	CC480K-GS	GJL-250	1.4408
231	Suction stage impeller	GJL-250	CC480K-GS	CC480K-GS	1.4408	1.4408
350	Bearing housing	GJL-250	GJL-250	GJL-250	GJL-250	GJL-250
381/529	Plain bearings	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC

13) For fluid temperatures up to $t \leq 140$ °C. DN 200: for fluid temperatures up to $t \leq 60$ °C. With material codes 15, 16, 17 for fluid temperatures up to $t \leq 40$ °C

14) DN 200 only available in material codes 11 and 12

15) Only for sizes DN 32 to DN 150

16) For sizes DN 32 to DN 100

17) For sizes DN 125 to DN 150

18) Sizes DN 32 to DN 100: integrated in stage casing, sizes DN 125 to DN 200: separate

19) C45+N not available for size DN 200. Shaft also available in 1.4021 for sizes DN 32 to DN 150. Shaft for size DN 200 only available in 1.4021.

20) Available in 1.4462

Part No.	Part description	Material code				
		10 ¹³⁾	11 ¹³⁾¹⁴⁾	12 ¹³⁾¹⁴⁾	13 ¹³⁾	14 ¹³⁾
441	Stuffing box housing	GJL-250	GJL-250	GJL-250	GJL-250	GJL-250
502.1	Casing wear ring (suction side)	GJL-250 ²¹⁾	1.4138 ²¹⁾	1.4138 ²¹⁾	GJL-250 ²¹⁾	GJL-250 ²¹⁾
502.2 ²²⁾	Casing wear ring (stages)	GJL-250	1.4138	1.4138	GJL-250	GJL-250
502.3 ²³⁾	Casing wear ring (diffuser)	-	1.4138	1.4138	-	-
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800
524	Shaft protecting sleeve (gland packing)	1.4122	1.4122	1.4122	1.4122	1.4122
550.1 ²⁴⁾	Sheet metal disc	1.4301	1.4301	1.4301	1.4301	1.4301
59-4	Balance drum	1.4021	1.4021	1.4021	1.4021	1.4021
540	Bush	GJL-250	GJL-250	GJL-250	GJL-250	GJL-250
905	Tie bolt	42 CrMo4	42 CrMo4	42 CrMo4	42 CrMo4	42 CrMo4

Material codes for versions with grey cast iron/steel casing

Part No.	Part description	Material code		
		15 ¹³⁾	16 ¹³⁾	17 ¹³⁾
106	Suction casing	GP240GH+N	GP240GH+N	GP240GH+N
107	Discharge casing	GP240GH+N	GP240GH+N	GP240GH+N
108	Stage casing	GJL-250	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GJL-250 ¹⁷⁾	GJL-250
171	Diffuser	GJL-250 ¹⁷⁾¹⁸⁾	CC480K-GS	GJL-250 ^{17) 18)}
210	Shaft	C45+N ¹⁹⁾	C45+N ¹⁹⁾	C45+N ¹⁹⁾
230	Impeller	CC480K-GS	CC480K-GS	GJL-250
231	Suction stage impeller	CC480K-GS	CC480K-GS	GJL-250
350	Bearing housing	GJL-250	GJL-250	GJL-250
381/529	Plain bearings	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	GJL-250	GJL-250	GJL-250
502.1	Casing wear ring (suction side)	1.4138	1.4138	GJL-250
502.2 ²²⁾	Casing wear ring (stages)	1.4138	1.4138	GJL-250
502.3 ²³⁾	Casing wear ring (diffuser)	-	-	-
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800
524	Shaft protecting sleeve (gland packing)	1.4122	1.4122	1.4122
550.1 ²⁴⁾	Sheet metal disc	1.4301	1.4301	1.4301
59-4	Balance drum	1.4021	1.4021	1.4021
540	Bush	GJL-250	GJL-250	GJL-250
905	Tie bolt	30 NCD 16	30 NCD 16	30 NCD 16

Material codes 20, 21, 22 and 23 for versions with cast steel casing

Part No.	Part description	Material code			
		20	21	22	23
106	Suction casing	GP240GH+N	GP240GH+N	GP240GH+N	GP240GH+N
107	Discharge casing	GP240GH+N	GP240GH+N	GP240GH+N	1.4408
108	Stage casing	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾
171	Diffuser	GJL-250	GJL-250	1.4408	1.4408
210	Shaft	C45+N ¹⁹⁾	C45+N ¹⁹⁾	1.4021+QT ²⁰⁾	1.4021+QT ²⁰⁾

13) For fluid temperatures up to $t \leq 140$ °C. DN 200: for fluid temperatures up to $t \leq 60$ °C. With material codes 15, 16, 17 for fluid temperatures up to $t \leq 40$ °C

14) DN 200 only available in material codes 11 and 12

21) For sizes DN 100 to DN 200

22) Only for sizes DN 125 to DN 200

23) Only for size DN 200

24) For sizes DN 32 to DN 100 only; also used as casing wear ring

Part No.	Part description	Material code			
		20	21	22	23
230	Impeller	GJL-250	GJL-250	1.4408	1.4408
231	Suction stage impeller	GJL-250	1.4408	1.4408	1.4408
350	Bearing housing	GJL-250	GJL-250	GJL-250	GJL-250
381/529	Plain bearings	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	GP240GH+N / 1.4404 ²⁵⁾	GP240GH+N / 1.4404 ²⁵⁾	GP240GH+N / 1.4404 ²⁵⁾	1.4408 / 1.4404 ²⁵⁾
502.1	Casing wear ring (suction side)	GJL-250	GJL-250	1.4138	1.4138
502.2 ²²⁾	Casing wear ring (stages)	GJL-250	GJL-250	1.4138	1.4138
502.3 ²³⁾	Casing wear ring (diffuser)	-	-	-	-
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4571	1.4571
524	Shaft protecting sleeve (gland packing)	1.4122	1.4122	1.4122	1.4122
550.1 ²⁴⁾	Sheet metal disc	1.4301	1.4301	1.4571	1.4571
59-4	Balance drum	1.4021	1.4021	1.4021	1.4021
540	Bush	GJL-250	GJL-250	1.4021	1.4021
905	Tie bolt	30 NCD 16	30 NCD 16	30 NCD 16	30 NCD 16

Material codes 25, 26, 27 and 28 for versions with cast steel casing

Part No.	Part description	Material code			
		25	26	27	28
106	Suction casing	GP240GH+N	GP240GH+N	GP240GH+N	1.4317
107	Discharge casing	GP240GH+N	GP240GH+N	1.4317	1.4317
108	Stage casing	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾ 1.4317 ²⁶⁾	1.0576 S355J2H (WSZ=0469) ¹⁶⁾ / GP240GH+N ¹⁷⁾ 1.4317 ²⁶⁾
171	Diffuser	GJL-250	CC480K-GS	GJL-250	GJL-250
210	Shaft	C45+N ¹⁹⁾	C45+N ¹⁹⁾	1.4021+QT	1.4021+QT
230	Impeller	CC480K-GS	CC480K-GS	GJL-250	GJL-250
231	Suction stage impeller	CC480K-GS	CC480K-GS	GJL-250	GJL-250
350	Bearing housing	GJL-250	GJL-250	GJL-250	GJL-250
381/529	Plain bearings	SiC/SiC	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	GP240GH+N / 1.4404 ²⁵⁾	GP240GH+N / 1.4404 ²⁵⁾	GP240GH+N / 1.4404 ²⁵⁾	GP240GH+N / 1.4404 ²⁵⁾
502.1	Casing wear ring (suction side)	1.4138	1.4138	GJL-250	GJL-250
502.2 ²²⁾	Casing wear ring (stages)	1.4138	1.4138	GJL-250	GJL-250
502.3 ²³⁾	Casing wear ring (diffuser)	-	-	-	-
523	Shaft sleeve (mechanical seal)	1.4057+QT800	1.4057+QT800	1.4057+QT800	1.4057+QT800
524	Shaft protecting sleeve (gland packing)	1.4122	1.4122	1.4122	1.4122
550.1 ²⁴⁾	Sheet metal disc	1.4301	1.4301	1.4301	1.4301
59-4	Balance drum	1.4021	1.4021	1.4021	1.4021
540	Bush	GJL-250	GJL-250	GJL-250	GJL-250
905	Tie bolt	30 NCD 16	30 NCD 16	30 NCD 16	30 NCD 16

Material code for versions with stainless steel casing

Part No.	Part description	Material code		
		30	31 / RO	33 / RO
106	Suction casing	1.4408	1.4517	1.4469 PREN 40
107	Discharge casing	1.4408	1.4517	1.4469 PREN 40
108	Stage casing	1.4404 ¹⁶⁾ / 1.4408 ¹⁷⁾	1.4517	1.4410 (WSZ=1439) ¹⁶⁾ / 1.4469 PREN 40 ¹⁷⁾
171	Diffuser	1.4408	1.4517	1.4469 PREN 40

²⁵⁾ For shaft seal code 64, only 1.4404

²⁶⁾ Size DN 125: last stage casing made of 1.4317

Part No.	Part description	Material code		
		30	31 / RO	33 / RO
210	Shaft	1.4462	1.4462	1.4501
230	Impeller	1.4408	1.4517	1.4469 PREN 40
231	Suction stage impeller	1.4408	1.4517	1.4469 PREN 40
350	Bearing housing	GJL-250	GJL-250	GJL-250
381/529	Plain bearings	SiC/SiC	SiC/SiC	SiC/SiC
441	Stuffing box housing	1.4408 / 1.4404 ²⁵⁾	1.4517	1.4469 PREN 40
502.1	Casing wear ring (suction side)	1.4571	1.4462	1.4501
502.2 ²²⁾	Casing wear ring (stages)	1.4571	1.4462	1.4501
502.3 ²³⁾	Casing wear ring (diffuser)	-	-	-
523	Shaft sleeve (mechanical seal)	1.4571	1.4462	1.4501
524	Shaft protecting sleeve (gland packing)	-	-	-
550.1 ²⁴⁾	Sheet metal disc	1.4571	1.4539	1.4547
59-4	Balance drum	1.4404	1.4462	1.4501
540	Bush	1.4138	1.4462	1.4501
905	Tie bolt	30 NCD 16	30 NCD 16	30 NCD 16

Key to materials

Description	Code and material No.	Standard	To ASTM ²⁷⁾
Grey cast iron	GJL-250	EN 1561	A48:40B
Bronze	CC480K-GS	EN 1982	B505C90250
Steel	C45+N / 1.0503+N	EN 10083-2	A29Gr.1045
Steel	S355J2H / 1.0576	EN 10210	A618 Grade III
Cast steel	GP240GH+N / 1.0619+N	EN 10213	A216WCB
Chrome steel	1.4021+QT / X20Cr13+QT	EN 10088	A276:420
Chrome nickel steel	1.4122 / X35CrMo17	EN 10088	A276S42010
Chrome nickel steel	1.4057+QT800 / X17CrNi16-2- QT800	EN 10088	A276:431
Chrome nickel steel	1.4138 / GX120CrMo29-2	SEW 410	-
Chrome nickel steel	1.4301 / X5CrNi18-10	EN 10088	A276:304
Chrome nickel molybdenum steel	1.4404 / X2CrNiMo 17-12-2	EN 10088	A276:316L
Chrome nickel molybdenum cast steel	1.4408 / GX5CrNiMo19-11-2	EN 10213	A743CF8M
Chrome nickel molybdenum steel	1.4462 / X2CrNiMoN22-5-3	EN 10088	A473S32950
Chrome nickel molybdenum steel	1.4571 / X6CrNiMoTi17-12-2	EN 10088	A276:316
Silicon carbide	SiC without free silicon	-	SiC without free silicon
Steel bars	30 NCD 16	KSB materials data sheet, material identification code 1179	A540Gr.B24
Steel	42CrMo4 / 1.7225	EN 10083-1	A322GR.4140
Chrome nickel molybdenum cast steel	1.4317	EN 10213	A487 Grade CA6NM
Cast duplex stainless steel	1.4517	EN 10213	A995 Grade CD4MCuN
Austenitic stainless steel	1.4539	EN 10088	A240 N08904
Cast super duplex stainless steel	1.4469 ²⁸⁾	EN 10213	A995 Grade 5A
Super duplex stainless steel	1.4410	EN 10088	A276 S32750
Super duplex stainless steel	1.4501	EN 10088	A276 S32760
Austenitic stainless steel	1.4547	EN 10088	A240 S31254
Nodular cast iron	GJS-400-15	EN 1563	A536 Grade 60_40_18

²⁷⁾ Similar

²⁸⁾ PREN ≥ 40 to EN 10213

Seal codes for the mechanical seal

Available versions of mechanical seals:

- Balanced and unbalanced
- Uncooled up to 140 °C or cooled up to 200 °C
- Single or double
- Cartridge mechanical seal

Key to the material code of the mechanical seal

Code	Material
A	Carbon graphite, antimony-impregnated
B	Carbon graphite, resin-impregnated

Code	Material
Q1	Silicon carbide, solid, sintered without pressure
Q12	Silicon carbide, shrink-fitted, sintered without pressure
U2	Tungsten carbide, Ni-bonded (solid)
U3	Tungsten carbide, NiCrMo-bonded
E	EPDM rubber
E4	EPDM peroxide-cured
V	Fluoroelastomer, e.g. Viton
V5	Fluoroelastomer, e.g. Viton (90 shore)
M	Hastelloy
G	CrNiMo steel

Seal codes for mechanical seal versions

Seal codes for single mechanical seal (supplier: Burgmann)

Mechanical seal	Material	Static seals	Uncooled				Cooled ≤ 200 °C	P _{max} [bar]
			≤ 45 °C	≤ 100 °C	≤ 120 °C	≤ 140 °C		
Bellows-type mechanical seal, unbalanced RMG13 ²⁹⁾	U3BEGG	EPDM	61	-	-	-	-	18
Balanced mechanical seal H7N	Q1Q1VGG	FPM	63	-	-	-	-	16
Balanced mechanical seal H7N	Q1AEGG	EPDM	-	-	-	-	64	40
Balanced mechanical seal H7N	Q1BE4GG	EPDM	67	-	-	-	-	40
Bellows-type mechanical seal, unbalanced MG13, MG1S4 or H7N ³⁰⁾	U2U2VGG, U3U3VGG	FPM	68	-	-	-	-	12 ³¹⁾ 16 ³²⁾
Balanced mechanical seal HRN	AQ1EMG	EPDM	69	-	-	-	-	25
Balanced mechanical seal H7N	Q1AEGG	EPDM	81	-	-	-	-	40
Balanced mechanical seal H75N	AQ1V5GG	FPM	88	-	-	-	-	> 40
Balanced mechanical seal HJ977GN	Q12Q1VGG	FPM	53	-	-	-	-	10
Balanced mechanical seal H7N	Q1AVGG	FPM	55	-	-	-	-	40
Balanced mechanical seal HRN	BQ1EMG	EPDM	59	-	-	-	-	25
Unbalanced mechanical seal MG12-G6	AQ1VMM	FPM	80	-	-	-	-	16
Unbalanced mechanical seal M7N	Q1AVMM	FPM	82	-	-	-	-	25
Unbalanced mechanical seal MG12-G6	Q1Q1VMM	FPM	83	-	-	-	-	10

Seal codes for single mechanical seal (supplier: John Crane)

Mechanical seal	Material	Static seals	Uncooled				Cooled ≤ 200 °C	P _{max} [bar]
			≤ 45 °C	≤ 100 °C	≤ 120 °C	≤ 140 °C		
Balanced mechanical seal 57B	AQ1EGG	EPDM	42	-	-	-	-	40
Balanced mechanical seal 57B	Q1Q1VGG	FPM	43	-	-	-	-	25
Balanced mechanical seal 57B	AQ1VGG	FPM	45	-	-	-	-	40

Seal codes for double mechanical seal (supplier: Burgmann)

Mechanical seal	Material	Static seals	Seal code	P _{max}
			≤ 140 °C	[bar]
Quench arrangement H7N	Q1AEGG	EPDM	71	40
Tandem arrangement H7N/ H7N	Q1AEGG	EPDM	72	40
Back-to-back arrangement H7N/ H7N	Q1AEGG	EPDM	73	40

²⁹⁾ Sizes 32 and 50 only.

³⁰⁾ MG13 for sizes 32 and 50, MG1S4 for size 65, H7N for sizes 100, 125, 150 and 200

³¹⁾ Multitec 32, Multitec 50 and Multitec 65

³²⁾ Multitec 100, Multitec 125, Multitec 150 and Multitec 200

Seal codes for cartridge seal (standard)

Mechanical seal	Material	Static seals	Seal code		P _{max} [bar]
			≤ 100 °C	≤ 140 °C	
Burgmann Cartex SN6 single mechanical seal	AQ1EMG	EPDM	92		25
Burgmann Cartex SN6 single mechanical seal	Q1Q1VMG	FPM	93	-	12
Burgmann Cartex SN6 single mechanical seal	AQ1VMG	FPM	95	-	25

Seal codes for the gland packing

Available versions: uncooled up to 140 °C

Seal codes for the gland packing

Gland packing	Static seals	Seal codes		P _{max} [bar]
		Up to 100 °C	Up to 140 °C	
PTFE-impregnated polyacryl	FPM	65	-	25
PTFE-impregnated polyacryl	EPDM	66		25

Gland packing versions

	N/b	N/c
System conditions	Suction head operation P _{S absolute} ≥ 1 bar	P _{S absolute} < 1 bar (vessel under vacuum) with clean liquid from an external source Barrier pressure > pressure to be sealed off
Technical features	Without lantern ring	1 lantern ring, suction side 1 lantern ring, discharge side 2 tapped holes for piping

Technical data

Technical data

Size	Shaft diameter at the coupling [mm]	Bearing			Gland packing			Shaft protecting sleeve		Drive (P/N value)				Other		
		Fixed bearing	Radial bearing	Plain bearing	Packing ring dimensions	Lantern ring width	Number of packing rings	Gland packing	Single mechanical seal	Shaft C45+N	Shaft 1.4021+QT	Shaft 1.4462	Shaft 1.4501	Hydraulic system	Maximum impeller diameter	Spacer length of spacer-type couplings
					[mm]			[mm]							[mm]	
32	22	6309 ZZ C3-HT ³³⁾	6309 ZZ C3-HT ³³⁾	SiC	10 × 10	20	5	45 Ø	35/38 Ø	0,0214	0,0346	0,0302	0,0356	2.1	142	140
50	28	2 × 7309 BUA	6309 ZZ C3-HT ³³⁾	SiC	10 × 10	20	5	45 Ø	35/38 Ø	0,0523	0,0846	0,0738	0,0869	3.1/4.1	170/173	140
65	32	2 × 7309 BUA	6309 ZZ C3-HT ³³⁾	SiC	10 × 10	20	5	45 Ø	40 Ø	0,0697	0,1128	0,0984	0,1159	5.1/6.1	193/214	140
100	40	2 × 7312 BUA	6312C3	SiC	12 × 12	25	5	56 Ø	50 Ø	0,15	0,2426	0,2118	0,2495	7.1/8.1	241/245	180
125	50	2 × 7312 BUA	6312C3	SiC	12 × 12	25	6	66 Ø	60 Ø	0,3016	0,4879	0,4258	0,5016	9.1/9.2	301/273	180
125	50	2 × 7312 BUA	6312C3	SiC	12 × 12	25	6	66 Ø	60 Ø	0,3016	0,4879	0,4258	0,5016	10.1/10.2	305/270	180
150	60	2 × 7315 BUA	6315C3	SiC	16 × 16	32	6	78 Ø	70 Ø	0,5371	0,8688	0,7582	0,8930	11.1/11.2	378/342	200
150	60	2 × 7315 BUA	6315C3	SiC	16 × 16	32	6	78 Ø	70 Ø	0,5371	0,8688	0,7582	0,8930	12.1/12.2	382/337	200
200	60	2 × 7315 BUA	6315C3	-	16 × 16	32	6	78 Ø	70 Ø	-	0,8688	-	-	13.1/13.2	418/387	200
200	60	2 × 7315 BUA	6315C3	-	16 × 16	32	6	78 Ø	70 Ø	-	0,8688	-	-	14.1/14.2	426/390	200

Noise characteristics

Surface sound pressure level L_{pA} ³⁴⁾³⁵⁾

Rated power input P_N [kW]	Pump		Pump with electric motor	
	1450 rpm [dB]	2900 rpm [dB]	1450 rpm [dB]	2900 rpm [dB]
2,2	56	57	60	65
3,0	58	60	62	67
4,0	59	61	63	68
5,5	61	63	65	70
7,5	63	65	66	71
9	64	66	68	73
11	65	67	68	73
15	66	68	70	75
18,5	67	69	71	76
22	68	70	72	77
30	69	71	73	78
37	70	72	74	79
45	71	73	75	79
55	71	74	75	80
75	72	74	77	82
90	72	75	77	82
110	73	75	78	83
132	73	76	78	83
160	74	76	79	84
200	75	77	80	85
250	75	78	-	-
315	76	78	-	-
355	78	80	-	-
400	79	81	-	-
500	80	82	-	-

³³⁾ Applies to grease-lubricated bearings. For oil-lubricated bearings: type 6309C3

³⁴⁾ Measured at a distance of 1 m from the pump outline (as per DIN 45 635 Parts 1 and 24)

³⁵⁾ Increase for 60 Hz operation: 3500 rpm +3 dB; 1750 rpm +1 dB


Rated power input P _N [kW]	Pump		Pump with electric motor	
	1450 rpm [dB]	2900 rpm [dB]	1450 rpm [dB]	2900 rpm [dB]
560	80	82	-	-
630	82	83	-	-
710	82.5	84	-	-

Noise characteristics for other ratings/speeds on request.


Noise characteristics can only be guaranteed after consultation with the design/engineering department.

Selection charts


Multitec/Multitec-RO, 50 Hz, n = 2900 rpm

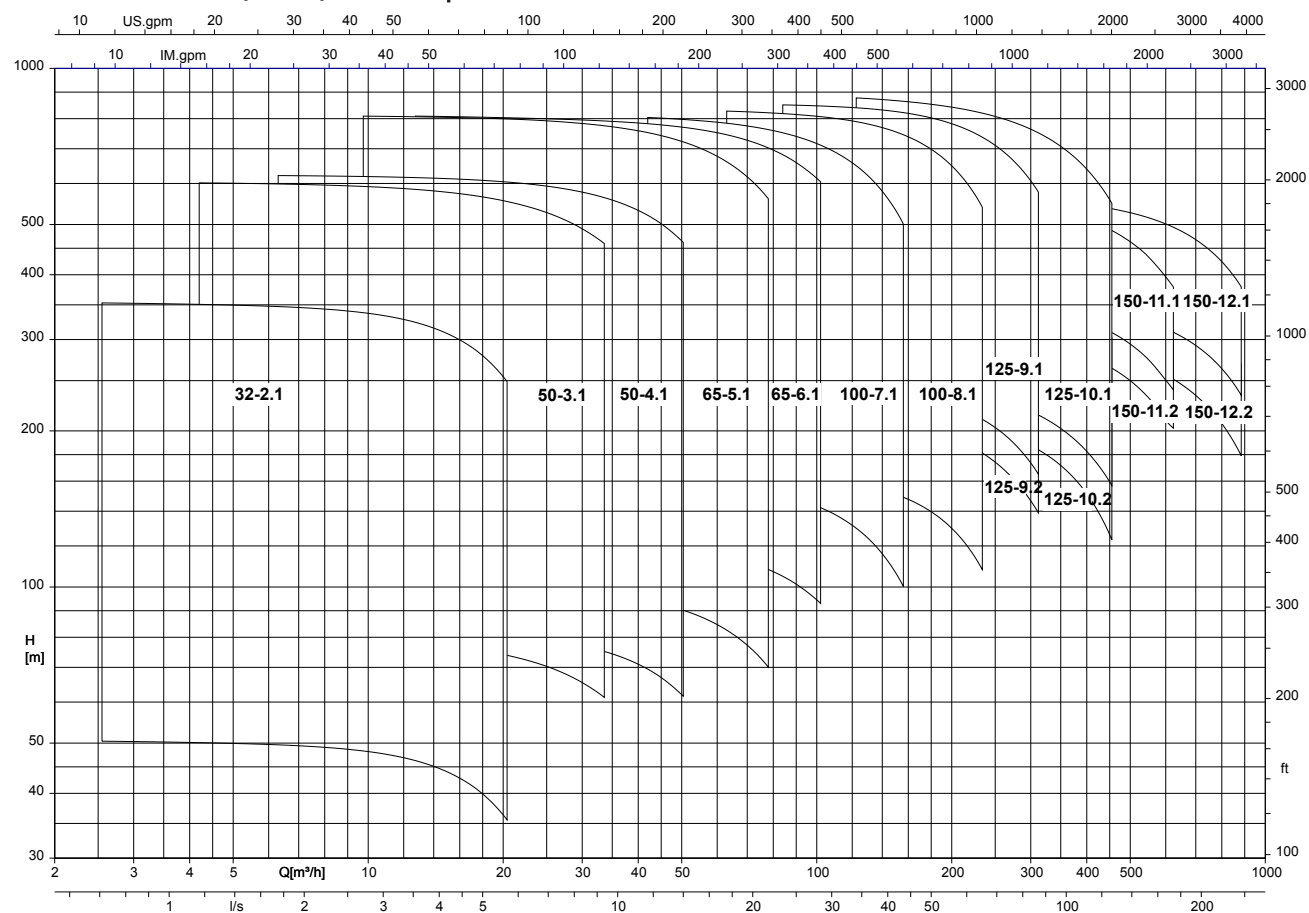


Multitec/Multitec-RO, 50 Hz, n = 1450 rpm

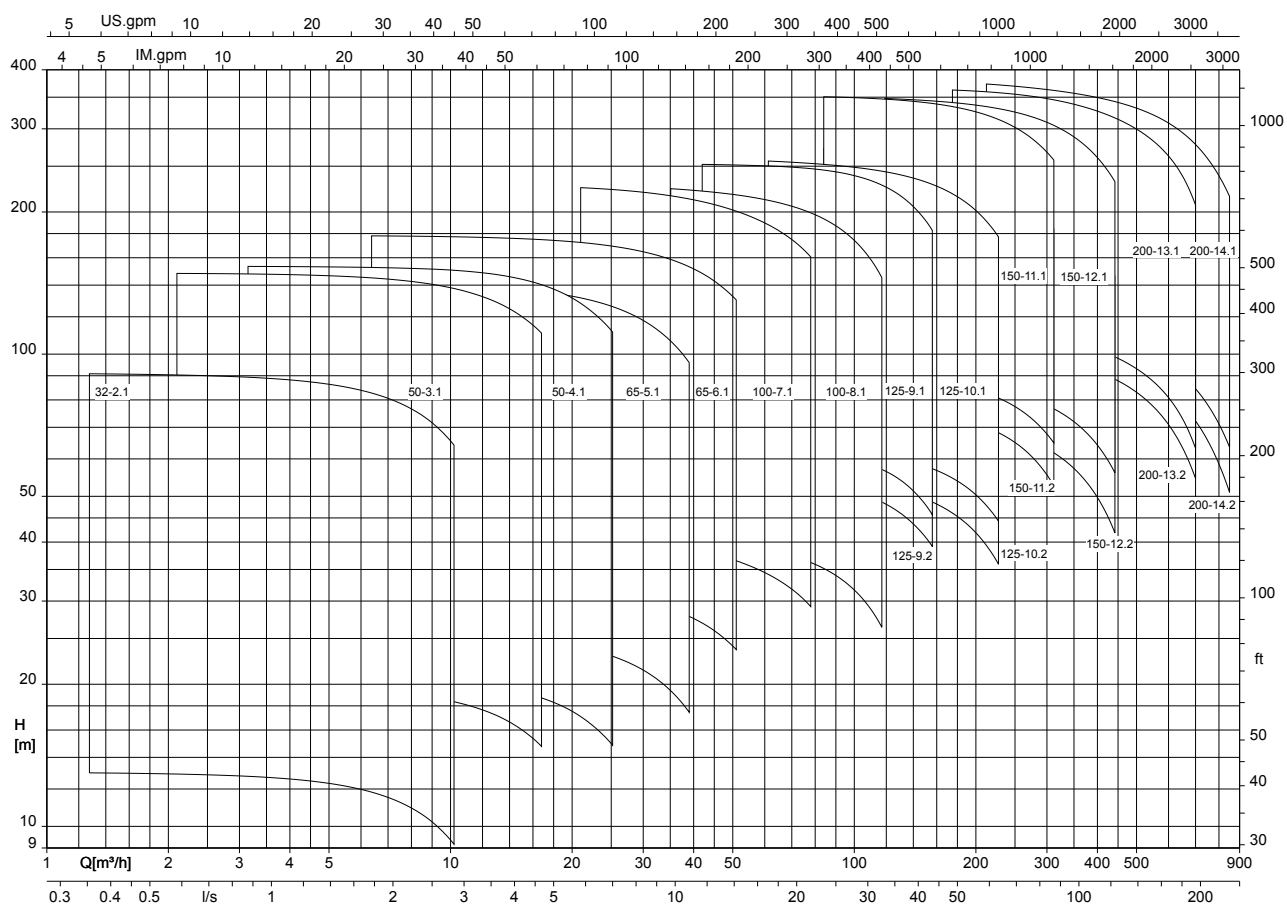

Multitec/Multitec-RO, 60 Hz, n = 3500 rpm

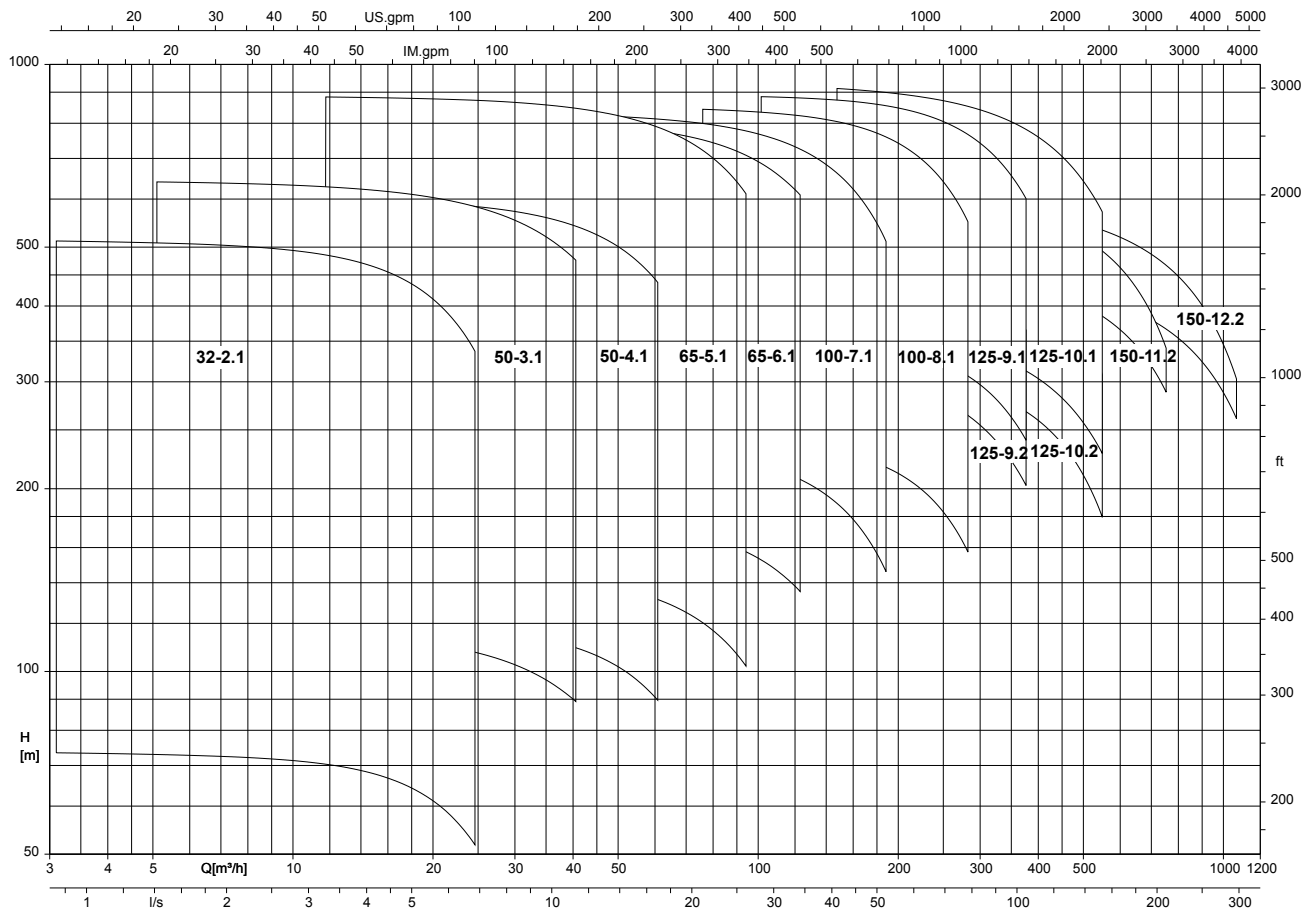

Multitec/Multitec-RO, 60 Hz, n = 1750 rpm

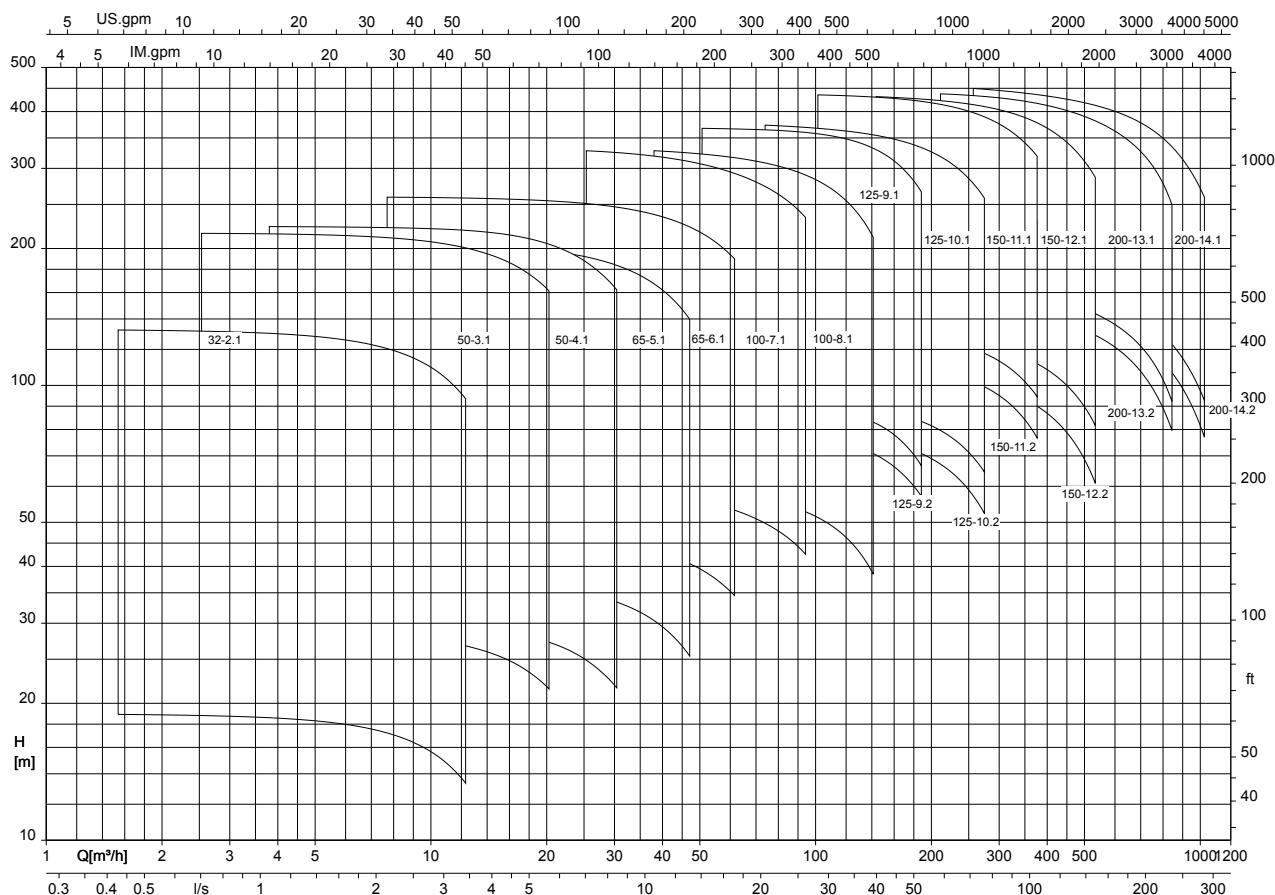

Drive


Driven by a three-phase current squirrel-cage motor of the following types of construction:

Types of construction

	Included
Installation types A, B, C, D	IMB3
Installation types E, F	IMV1 up to 45 kW, for higher ratings IMB35
Installation type V	IMV1
Enclosure	IP 55/IP 23
Thermal class	F
Direction of rotation of the pump	- Installation types A, B, C, E, F, V: clockwise, seen from the drive end - Installation type D: counter-clockwise, seen from the drive end
Options	Special voltages, explosion protection, insulated bearing, standstill heater

Dimensions

Dimensions of Multitec A, B, C, D and Multitec-RO

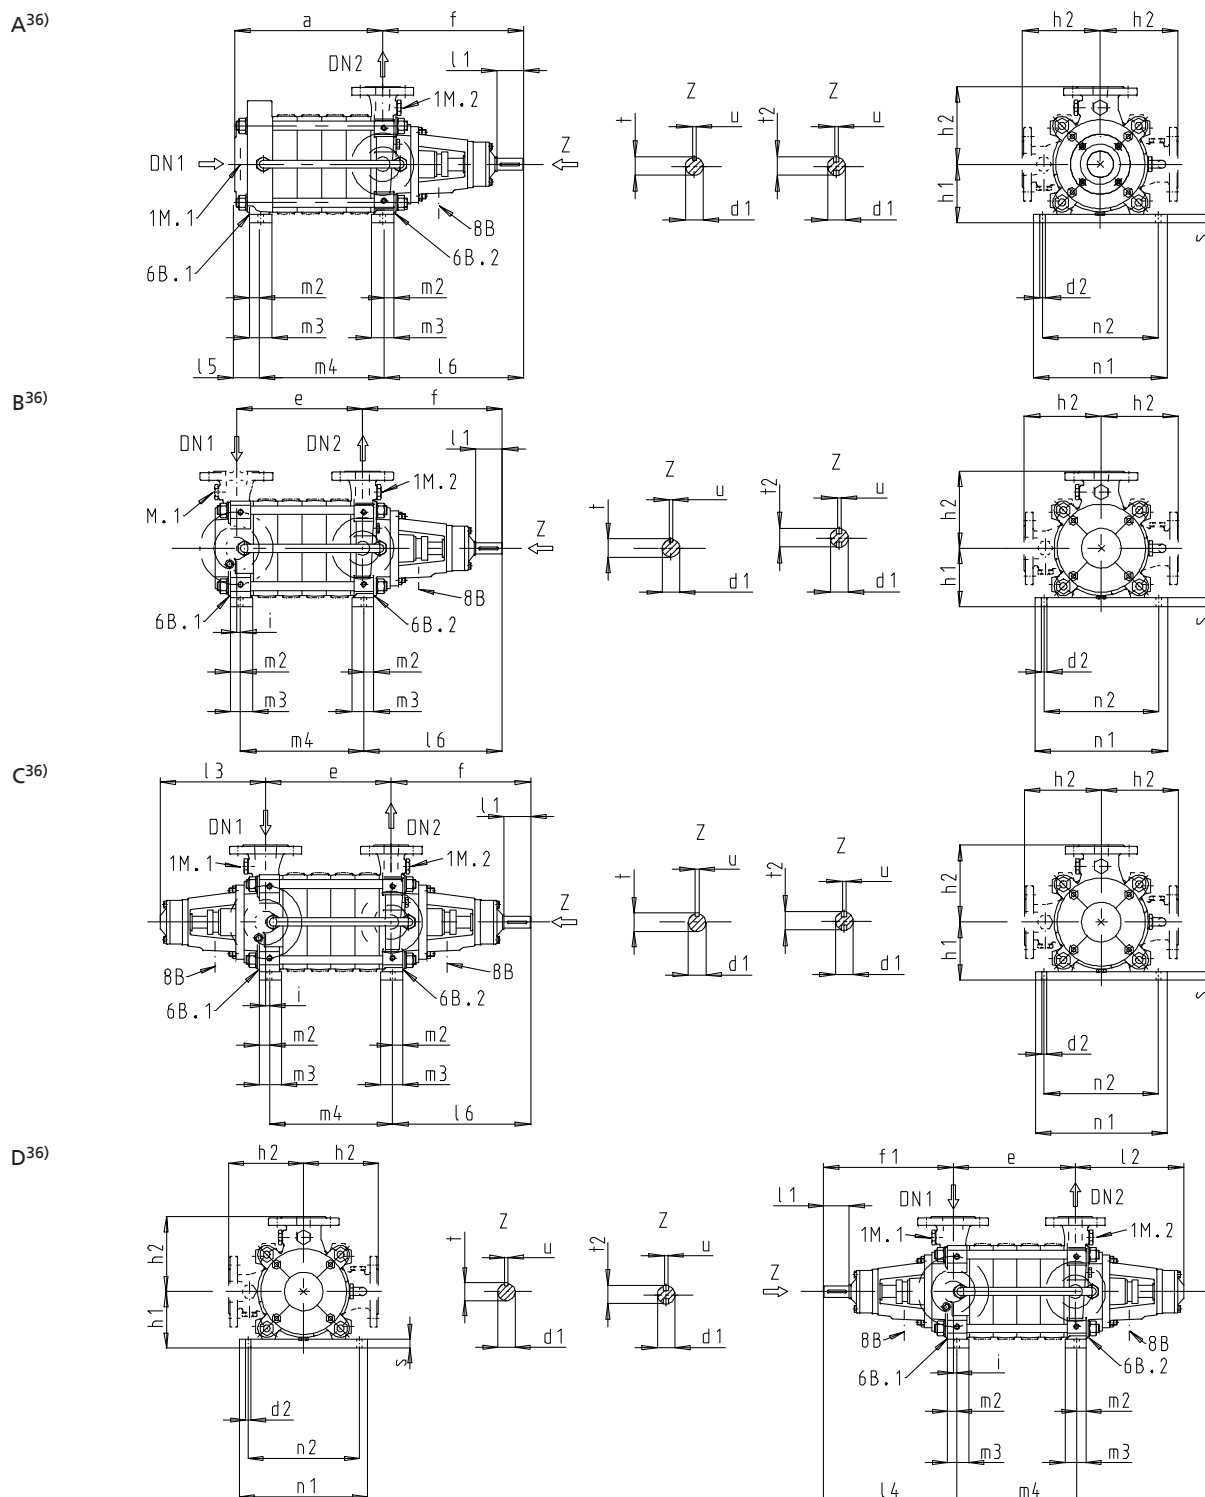

³⁶⁾ Some designs are fitted with a shaft with two keys.

Shaft dimensions [mm]

Size	d ₁	t	t ₂	u
32	22	24,5	-	6
50	28	31	-	8
65	32	35	38	10

Size	d ₁	t	t ₂	u
100	40	43	46	12
125	50	53,5	57	14
150	60	64	-	18
200	60	64	-	18

Connections

Connection	G = ISO 228/1, Rp = ISO 7/1	Multitec A / Multitec-RO A						Multitec B, C, D						
		32	50	65	100	125	150	32	50	65	100	125	150	200 ³⁷⁾
1M.1 ³⁸⁾	G	-	-	1/2	1/2	1/2	1	1/2	1/2	1/2	1/2	1/2	1/2	1/2
1M.2 ³⁸⁾	G	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
6B.1 ³⁸⁾	G	-	-	1/4	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1/2	1	1
6B.2 ³⁸⁾	G	1/4	1/4	1/2	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1/2	1/2	1/2
8B	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8

Dimensions of Multitec A, B, C and D [mm]

Multitec A, B, C, D	Number of stages	Material code	DN ₁		DN ₂	a	d ₁ _{kr}	d ₂	e	f	f ₁	h ₁	h ₂	i	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	m ₂	m ₃	m ₄	n ₁	n ₂	s
			Axial	Radial																						
32	2	10, 11, 12, 13, 14, 15, 16, 17, 20, 21, 22, 23, 25, 26, 30	65	50	32	168	22	16	121	309	295	132	175	9	50	255	241	304	56	306	20	40	115	330	290	20
	3		65	50	32	223	22	16	176	309	295	132	175	9	50	255	241	304	56	306	20	40	170	330	290	20
	4		65	50	32	278	22	16	231	309	295	132	175	9	50	255	241	304	56	306	20	40	225	330	290	20
	5		65	50	32	333	22	16	286	309	295	132	175	9	50	255	241	304	56	306	20	40	280	330	290	20
	6		65	50	32	388	22	16	341	309	295	132	175	9	50	255	241	304	56	306	20	40	335	330	290	20
	7		65	50	32	443	22	16	396	309	295	132	175	9	50	255	241	304	56	306	20	40	390	330	290	20
	8		65	50	32	498	22	16	451	309	295	132	175	9	50	255	241	304	56	306	20	40	445	330	290	20
	9		65	50	32	553	22	16	506	309	295	132	175	9	50	255	241	304	56	306	20	40	500	330	290	20
	10		65	50	32	608	22	16	561	309	295	132	175	9	50	255	241	304	56	306	20	40	555	330	290	20
	11		65	50	32	663	22	16	616	309	295	132	175	9	50	255	241	304	56	306	20	40	610	330	290	20
	12		65	50	32	718	22	16	671	309	295	132	175	9	50	255	241	304	56	306	20	40	665	330	290	20
	13		65	50	32	773	22	16	726	309	295	132	175	9	50	255	241	304	56	306	20	40	720	330	290	20
	14		65	50	32	828	22	16	781	309	295	132	175	9	50	255	241	304	56	306	20	40	775	330	290	20
	50		2	100	80	50	190 ³⁹⁾	28	16	151	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	128	330	290
3		100	80	50	252 ³⁹⁾	28	16	213	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	190	330	290	20	
4		100	80	50	314 ³⁹⁾	28	16	275	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	252	330	290	20	
5		100	80	50	376 ³⁹⁾	28	16	337	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	314	330	290	20	
6		100	80	50	438 ³⁹⁾	28	16	399	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	376	330	290	20	
7		100	80	50	500 ³⁹⁾	28	16	461	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	438	330	290	20	
8		100	80	50	562 ³⁹⁾	28	16	523	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	500	330	290	20	
9		100	80	50	624 ³⁹⁾	28	16	585	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	562	330	290	20	
10		100	80	50	686 ³⁹⁾	28	16	647	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	624	330	290	20	
11		100	80	50	748 ³⁹⁾	28	16	709	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	686	330	290	20	
12		100	80	50	810 ³⁹⁾	28	16	771	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	748	330	290	20	
13		100	80	50	872 ³⁹⁾	28	16	833	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	810	330	290	20	
14		100	80	50	934 ³⁹⁾	28	16	895	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	872	330	290	20	
15		100	80	50	996 ³⁹⁾	28	16	957	350	338	150	200	18	61	262	250	356	57 ³⁹⁾	355	20	40	934	330	290	20	
65		2	10, 11, 12, 13, 14, 15, 16, 17, 20, 21, 22, 23, 25, 26, 27, 30, 31 (RO), 33 (RO)	125	100	65	247	32	20	189	393	380	190	225	18	82	303	291	399	77	394	30	60	169	405	365
	3	125		100	65	326	32	20	268	393	380	190	225	18	82	303	291	399	77	394	30	60	248	405	365	25
	4	125		100	65	405	32	20	347	393	380	190	225	18	82	303	291	399	77	394	30	60	327	405	365	25
	5	125		100	65	484	32	20	426	393	380	190	225	18	82	303	291	399	77	394	30	60	406	405	365	25
	6	125		100	65	563	32	20	505	393	380	190	225	18	82	303	291	399	77	394	30	60	485	405	365	25
	7	125		100	65	642	32	20	584	393	380	190	225	18	82	303	291	399	77	394	30	60	564	405	365	25
	8	125		100	65	721	32	20	663	393	380	190	225	18	82	303	291	399	77	394	30	60	643	405	365	25
	9	125		100	65	800	32	20	742	393	380	190	225	18	82	303	291	399	77	394	30	60	722	405	365	25
	10	125		100	65	879	32	20	821	393	380	190	225	18	82	303	291	399	77	394	30	60	801	405	365	25
	11	125		100	65	958	32	20	900	393	380	190	225	18	82	303	291	399	77	394	30	60	880	405	365	25
	12	125		-	65	1037	32	20	-	393	-	190	225	-	82	-	-	-	-	77	394	30	60	959	405	365
	13	125	-	65	1116	32	20	-	393	-	190	225	-	82	-	-	-	-	77	394	30	60	1038	405	365	25
	14	125	-	65	1195	32	20	-	393	-	190	225	-	82	-	-	-	-	77	394	30	60	1117	405	365	25
	15	125	-	65	1274	32	20	-	393	-	190	225	-	82	-	-	-	-	77	394	30	60	1196	405	365	25
	16	125	-	65	1353	32	20	-	393	-	190	225	-	82	-	-	-	-	77	394	30	60	1275	405	365	25

37) For installation types C and D only

38) Not provided on Multitec RO A


39) For material variants 15, 16, 17, 20, 21, 22, 23, 25, 26, 30, 31 (RO) with ANSI flanges add 15 mm to dimensions "a" and "l5".

Multitec A, B, C, D	Number of stages	Material code	DN ₁		DN ₂	a	d _{1 k7}	d ₂	e	f	f ₁	h ₁	h ₂	i	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	m ₂	m ₃	m ₄	n ₁	n ₂	s		
			Axial	Radial																								
100	2	10, 11, 12, 13, 14, 15, 16, 17, 20, 21, 22, 23, 25, 26, 27, 28, 30, 31 (RO), 33 (RO)	150	125	100	306	40	26	233	472	463	235	275	30	110	339	329	492	103	462	35	70	213	504	450	30		
	3		150	125	100	396	40	26	323	472	463	235	275	30	110	339	329	492	103	462	35	70	303	504	450	30		
	4		150	125	100	486	40	26	413	472	463	235	275	30	110	339	329	492	103	462	35	70	393	504	450	30		
	5		150	125	100	576	40	26	503	472	463	235	275	30	110	339	329	492	103	462	35	70	483	504	450	30		
	6		150	125	100	666	40	26	593	472	463	235	275	30	110	339	329	492	103	462	35	70	573	504	450	30		
	7		150	125	100	756	40	26	683	472	463	235	275	30	110	339	329	492	103	462	35	70	663	504	450	30		
	8		150	125	100	846	40	26	773	472	463	235	275	30	110	339	329	492	103	462	35	70	753	504	450	30		
	9		150	125	100	936	40	26	863	472	463	235	275	30	110	339	329	492	103	462	35	70	843	504	450	30		
	10		150	125	100	1026	40	26	953	472	463	235	275	30	110	339	329	492	103	462	35	70	933	504	450	30		
	11		150	125	100	1116	40	26	1043	472	463	235	275	30	110	339	329	492	103	462	35	70	1023	504	450	30		
	125		2	15, 16, 17, 20, 21, 22, 23, 25, 26, 27, 28, 30, 31 (RO), 33 (RO), 35 (RO)	200	150	125	393	50	26	292	488	478	300	325	10	110	355	345	488	111	464	22	94	306	320	250	30
3		200	150		125	505	50	26	404	488	478	300	325	10	110	355	345	488	111	464	22	94	418	320	250	30		
4		200	150		125	617	50	26	516	488	478	300	325	10	110	355	345	488	111	464	22	94	530	320	250	30		
5		200	150		125	729	50	26	628	488	478	300	325	10	110	355	345	488	111	464	22	94	642	320	250	30		
6		200	150		125	841	50	26	740	488	478	300	325	10	110	355	345	488	111	464	22	94	754	320	250	30		
7		200	150		125	953	50	26	852	488	478	300	325	10	110	355	345	488	111	464	22	94	866	320	250	30		
8		200	150		125	1065	50	26	964	488	478	300	325	10	110	355	345	488	111	464	22	94	978	320	250	30		
2		200	150		125	393	50	30	292	488	478	300	325	38	110	355	345	512	136	490	45	90	255	605	561	50		
3		200	150		125	505	50	30	404	488	478	300	325	38	110	355	345	512	136	490	45	90	367	605	561	50		
4		200	150		125	617	50	30	516	488	478	300	325	38	110	355	345	512	136	490	45	90	479	605	561	50		
5		200	150		125	729	50	30	628	488	478	300	325	38	110	355	345	512	136	490	45	90	591	605	561	50		
6		200	150		125	841	50	30	740	488	478	300	325	38	110	355	345	512	136	490	45	90	703	605	561	50		
7		200	150		125	953	50	30	852	488	478	300	325	38	110	355	345	512	136	490	45	90	815	605	561	50		
8		200	150		125	1065	50	30	964	488	478	300	325	38	110	355	345	512	136	490	45	90	927	605	561	50		
150	2	15, 16, 17, 20, 21, 22, 23, 25, 26, 30, 31 (RO), 33 (RO), 35 (RO), 37 (RO)	250	200	150	452	60	34	338	594	578	350	400	22	140	426	411	600	137	567	30	104	342	350	265	30		
	3		250	200	150	584	60	34	470	594	578	350	400	22	140	426	411	600	137	567	30	104	474	350	265	30		
	4		250	200	150	716	60	34	602	594	578	350	400	22	140	426	411	600	137	567	30	104	606	350	265	30		
	5		250	200	150	848	60	34	734	594	578	350	400	22	140	426	411	600	137	567	30	104	738	350	265	30		
	6		250	200	150	980	60	34	866	594	578	350	400	22	140	426	411	600	137	567	30	104	870	350	265	30		
	2		250	200	150	452	60	36	338	594	578	350	400	46	140	426	411	624	161	591	50	100	294	735	679	50		
	3		250	200	150	584	60	36	470	594	578	350	400	46	140	426	411	624	161	591	50	100	426	735	679	50		
	4		250	200	150	716	60	36	602	594	578	350	400	46	140	426	411	624	161	591	50	100	558	735	679	50		
	5		250	200	150	848	60	36	734	594	578	350	400	46	140	426	411	624	161	591	50	100	690	735	679	50		
	6		250	200	150	980	60	36	866	594	578	350	400	46	140	426	411	624	161	591	50	100	822	735	679	50		
	7		250	200	150	1112	60	34	998	594	578	350	400	22	140	426	411	600	137	567	30	104	1002	350	265	30		
	10, 11, 12, 13, 14, 15, 16, 17, 20, 21, 22, 23, 25, 26, 30, 31 (RO), 33 (RO)			250	200	150	1112	60	36	998	594	578	350	400	46	140	426	411	624	161	591	50	100	954	735	679	50	
	200 ⁴⁰⁾		2	11, 11, 12	-	250	200	-	60	35	414	604	592	400	500	35	150	428	416	644	-	637	42	110	329	676	580	28,5
			3		-	250	200	-	60	35	574	604	592	400	500	35	150	428	416	644	-	637	42	110	489	676	580	28,5
			4		-	250	200	-	60	35	734	604	592	400	500	35	150	428	416	644	-	637	42	110	649	676	580	28,5
5		-	250		200	-	60	35	894	604	592	400	500	35	150	428	416	644	-	637	42	110	809	676	580	28,5		
6		-	250		200	-	60	35	1054	604	592	400	500	35	150	428	416	644	-	637	42	110	969	676	580	28,5		


40) For installation types C and D only

Dimensions of Multitec E, F

E

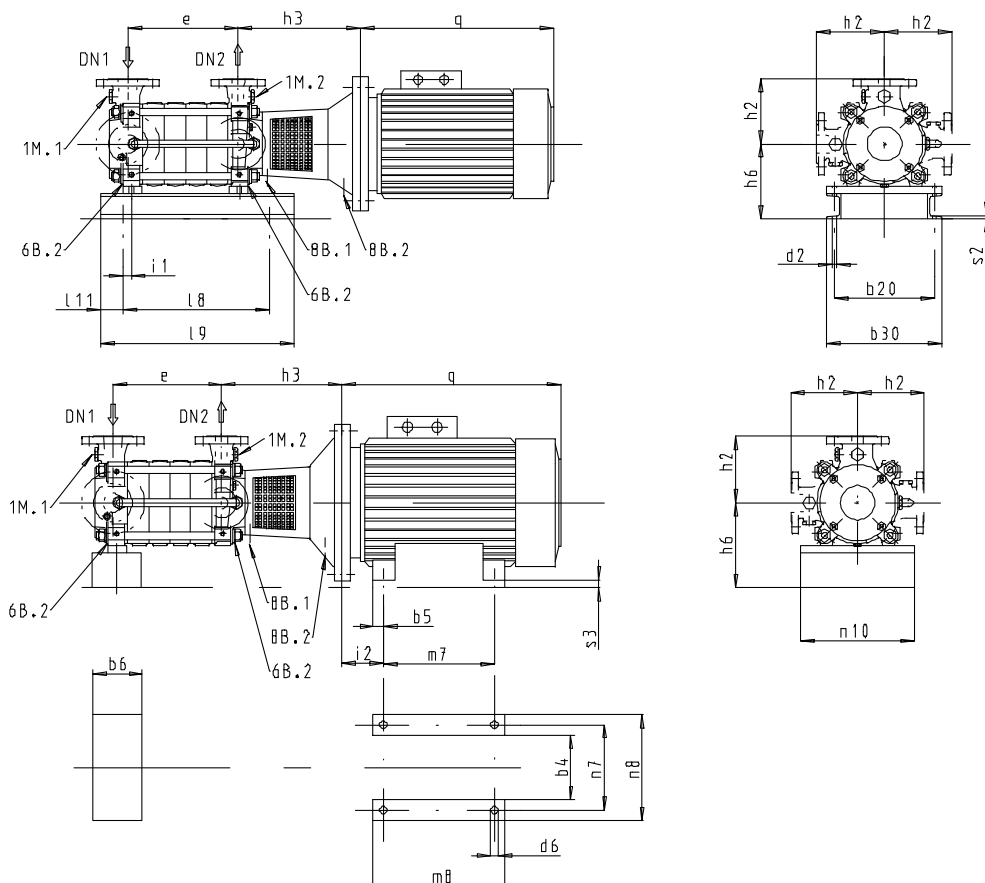

F

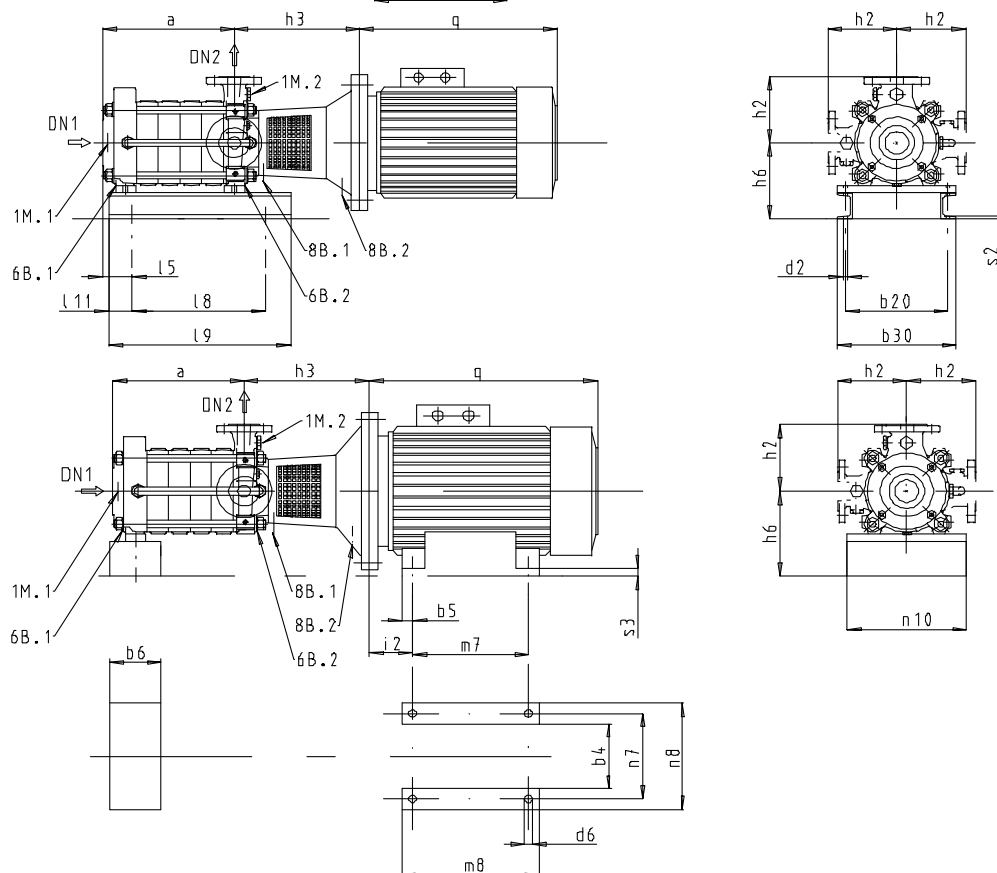

Connections

	G = ISO 228/1, Rp = ISO 7/1	Multitec E						Multitec F					
		32	50	65	100	125	150	32	50	65	100	125	150
1M.1	G	1/2	1/2	1/2	1/2	1/2	1/2	-	-	1/2	1/2	1/2	1
1M.2	G	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
6B.1	G	1/4	1/4	1/2	1/2	1/2	1	-	-	1/4	1/2	1/2	1/2
6B.2	G	1/4	1/4	1/2	1/2	1/2	1/2	1/4	1/4	1/2	1/2	1/2	1/2
8B.1	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
8B.2	Rp	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8

Dimensions of Multitec E and F [mm]


Multitec E, F	Number of stages	DN ₁		DN ₂	a	b ₂₀	b ₃₀	d ₂	e	h ₂	i ₁	l ₅	l ₈	l ₉	l ₁₁	n ₁₀	s ₂
		Axial	Radial														
32	2	65	50	32	168	290	330	18	121	175	9	56	150	580	60	330	6
	3	65	50	32	223	290	330	18	176	175	9	56	150	580	60	330	6
	4	65	50	32	278	290	330	18	231	175	9	56	300	650	60	330	6
	5	65	50	32	333	290	330	18	286	175	9	56	300	650	60	330	6
	6	65	50	32	388	290	330	18	341	175	9	56	355	700	60	330	6
	7	65	50	32	443	290	330	18	396	175	9	56	410	760	60	330	6
50	2	100	80	50	190	290	330	18	151	200	18	57	150	580	60	330	6
	3	100	80	50	252	290	330	18	213	200	18	57	150	580	60	330	6
	4	100	80	50	314	290	330	18	275	200	18	57	300	650	60	330	6
	5	100	80	50	376	290	330	18	337	200	18	57	355	700	60	330	6
	6	100	80	50	438	290	330	18	399	200	18	57	410	760	60	330	6
65	2	125	100	65	247	365	405	18	189	225	18	77	200	760	60	405	6
	3	125	100	65	326	365	405	18	268	225	18	77	270	900	60	405	6
	4	125	100	65	405	365	405	18	347	225	18	77	350	1000	60	405	6

Variable dimensions for motors IP 55 with 2 or 4 poles (Multitec E and F 32-50-65, 50 Hz) [mm]

Type	[kW]	b ₆	d ₆	h ₆			i ₂	m7	m ₈ ⁴¹⁾	n ₇ ⁴¹⁾	n ₈ ⁴¹⁾	n ₁₀ ⁴¹⁾	s ₃ ⁴¹⁾	2-pole					4-pole						
				Multitec										IEC	Flange (FF)	h ₃			q	IEC	Flange (FF)	h ₃			q
				32	50	65										32	50	65				32	50	65	
V1	2,2	-	-	212	-	-	-	-	-	-	-	-	-	90L	215	-	-	-	-	100L	215	302	309	330	335
	3	-	-	212	-	-	-	-	-	-	-	-	-	100L	215	302	-	-	335	100L	215	302	309	330	335
	4	-	-	212	-	-	-	-	-	-	-	-	-	112M	215	302	-	-	329	112M	215	302	309	330	329
	5,5	-	-	212	230	-	-	-	-	-	-	-	-	132S	265	322	329	-	385	132S	265	322	329	350	385
	7,5	-	-	212	230	-	-	-	-	-	-	-	-	132S	265	322	329	-	385	132M	265	322	329	350	385
	11	-	-	212	230	270	-	-	-	-	-	-	-	160M	300	352	359	381	494	160M	300	352	359	381	494
	15	-	-	212	230	270	-	-	-	-	-	-	-	160M	300	352	359	381	494	160L	300	352	359	381	494
	18,5	-	-	212	230	270	-	-	-	-	-	-	-	160L	300	352	359	381	494	180M	300	-	359	381	558
	22	-	-	-	230	270	-	-	-	-	-	-	-	180M	300	-	359	381	558	-	-	-	-	-	-
	30	-	-	-	230	270	-	-	-	-	-	-	-	200L	350	-	362	381	611	-	-	-	-	-	-
37	-	-	-	230	270	-	-	-	-	-	-	-	200L	350	-	362	381	611	-	-	-	-	-	-	
B35	45	140	19	-	-	225	149	311	361	356	436	240	34	225M	400	-	-	384	708	-	-	-	-	-	-
	55	50	24	-	-	280	168	349	409	406	490		72	250M	500	-	-	414	747	-	-	-	-	-	-
	75	50	24	-	-	280	190	368	479	457	540		42	280S	500	-	-	414	820	-	-	-	-	-	-

⁴¹⁾ For information purposes

Dimensions of Multitec V

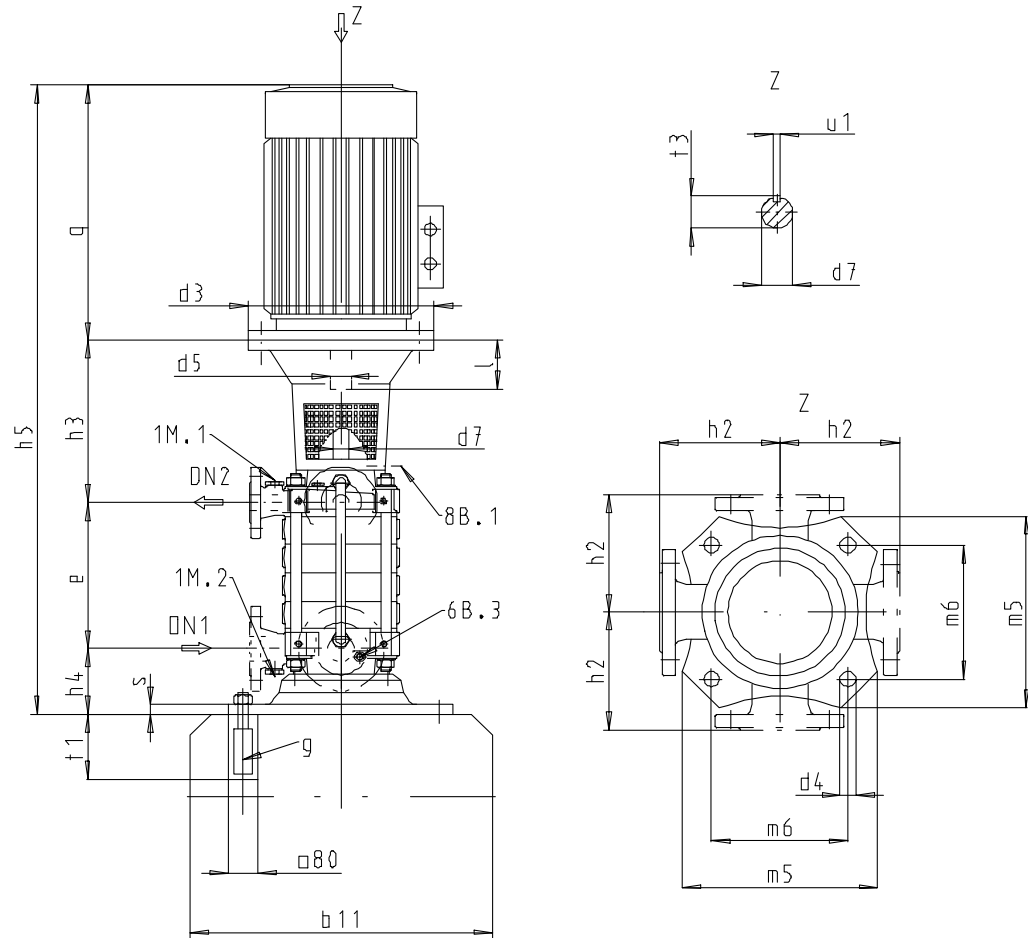

Connections

Connection	G = ISO 228/1, Rp = ISO 7/1	Multitec V					
		32	50	65	100	125	150
1M.1	G	1½	1½	1½	1½	1½	1½
1M.2	G	1½	1½	1½	1½	1½	1½
6B.3	G	¼	¼	½	½	½	1
8B	Rp	⅜	⅜	⅜	⅜	⅜	⅜

Shaft dimensions [mm]

Size	d_7	t_3	u_1	Size	d_7	t_3	u_1
32	30	33	8	100	40	43	12
50	30	33	8	125	50	53,5	14
65	35	38	10	150	60	64	18

Dimensions of Multitec V [mm]

Multitec V	Number of stages	DN ₁	DN ₂	b ₁₁	d ₄	e	g	h ₂	h ₄	m ₅	m ₆	s	t ₁
32	2	50	32	490	18	121	M16x250 MU	175	129	345	266	20	250
	3	50	32	490	18	176	M16x250 MU	175	129	345	266	20	250
	4	50	32	490	18	231	M16x250 MU	175	129	345	266	20	250
	5	50	32	490	18	286	M16x250 MU	175	129	345	266	20	250
	6	50	32	490	18	341	M16x250 MU	175	129	345	266	20	250

Multitec V	Number of stages	DN ₁	DN ₂	b ₁₁	d ₄	e	g	h ₂	h ₄	m ₅	m ₆	s	t ₁
	7	50	32	490	18	396	M16x250 MU	175	129	345	266	20	250
	8	50	32	490	18	451	M16x250 MU	175	129	345	266	20	250
	9	50	32	490	18	506	M16x250 MU	175	129	345	266	20	250
	10	50	32	490	18	561	M16x250 MU	175	129	345	266	20	250
	11	50	32	490	18	616	M16x250 MU	175	129	345	266	20	250
	12	50	32	490	18	671	M16x250 MU	175	129	345	266	20	250
	13	50	32	490	18	726	M16x250 MU	175	129	345	266	20	250
50	14	50	32	490	18	781	M16x250 MU	175	129	345	266	20	320
	2	80	50	490	18	151	M16x320 MU	200	136	345	266	20	320
	3	80	50	490	18	213	M16x320 MU	200	136	345	266	20	320
	4	80	50	490	18	275	M16x320 MU	200	136	345	266	20	320
	5	80	50	490	18	337	M16x320 MU	200	136	345	266	20	320
	6	80	50	490	18	399	M16x320 MU	200	136	345	266	20	320
	7	80	50	490	18	461	M16x320 MU	200	136	345	266	20	320
	8	80	50	490	18	523	M16x320 MU	200	136	345	266	20	320
	9	80	50	490	18	585	M16x320 MU	200	136	345	266	20	320
	10	80	50	490	18	647	M16x320 MU	200	136	345	266	20	320
	11	80	50	490	18	709	M16x320 MU	200	136	345	266	20	320
	12	80	50	490	18	771	M16x320 MU	200	136	345	266	20	320
	13	80	50	490	18	833	M16x320 MU	200	136	345	266	20	320
	14	80	50	490	18	895	M16x320 MU	200	136	345	266	20	320
	15	80	50	490	18	957	M16x320 MU	200	136	345	266	20	320
65	2	100	65	540	18	189	M16x320 MU	225	170	400	304	22	320
	3	100	65	540	18	268	M16x320 MU	225	170	400	304	22	320
	4	100	65	540	18	347	M16x320 MU	225	170	400	304	22	320
	5	100	65	540	18	426	M16x320 MU	225	170	400	304	22	320
	6	100	65	540	18	505	M16x320 MU	225	170	400	304	22	320
	7	100	65	540	18	584	M16x320 MU	225	170	400	304	22	320
	8	100	65	540	18	663	M16x320 MU	225	170	400	304	22	320
	9	100	65	540	18	742	M16x320 MU	225	170	400	304	22	320
	10	100	65	540	18	821	M16x320 MU	225	170	400	304	22	320
	11	100	65	540	18	900	M16x320 MU	225	170	400	304	22	320
100	2	125	100	690	33	233	M30x400 MU	275	212	545	405	30	400
	3	125	100	690	33	323	M30x400 MU	275	212	545	405	30	400
	4	125	100	690	33	413	M30x400 MU	275	212	545	405	30	400
	5	125	100	690	33	503	M30x400 MU	275	212	545	405	30	400
	6	125	100	690	33	593	M30x400 MU	275	212	545	405	30	400
	7	125	100	690	33	683	M30x400 MU	275	212	545	405	30	400
	8	125	100	690	33	773	M30x400 MU	275	212	545	405	30	400
	9	125	100	690	33	863	M30x400 MU	275	212	545	405	30	400
	10	125	100	690	33	953	M30x400 MU	275	212	545	405	30	400
	11	125	100	690	33	1043	M30x400 MU	275	212	545	405	30	400
125	2	150	125	690	33	292	M30x400 MU	325	227	545	405	30	400
	3	150	125	690	33	404	M30x400 MU	325	227	545	405	30	400
	4	150	125	690	33	516	M30x400 MU	325	227	545	405	30	400
	5	150	125	690	33	628	M30x400 MU	325	227	545	405	30	400
	6	150	125	690	33	740	M30x400 MU	325	227	545	405	30	400
	7	150	125	690	33	852	M30x400 MU	325	227	545	405	30	400
	8	150	125	690	33	964	M30x400 MU	325	227	545	405	30	400
150	2	200	150	750	33	338	M30x400 MU	400	250	600	430	30	400
	3	200	150	750	33	470	M30x400 MU	400	250	600	430	30	400
	4	200	150	750	33	602	M30x400 MU	400	250	600	430	30	400
	5	200	150	750	33	734	M30x400 MU	400	250	600	430	30	400
	6	200	150	750	33	866	M30x400 MU	400	250	600	430	30	400

Variable dimensions for motors IP 55 with 2 or 4 poles (Multitec V, 50 Hz) [mm]

Multitec V	q	h ₅	IP55																	
			50 Hz/60 Hz						h ₃											
			2 poles			4 poles			2 poles						4 poles					
			d ₃	d ₅	l	d ₃	d ₅	l	32	50	65	100	125	150	32	50	65	100	125	150
2,2	42)	42)	-	-	-	250	28	60	-	-	-	-	-	-	302	309	331	-	-	-
3,0			250	28	60	250	28	60	302	-	-	-	-	-	302	309	331	-	-	-
4,0			250	28	60	250	28	60	302	309	-	-	-	-	302	309	331	-	-	-
5,5			300	38	80	300	38	80	322	329	-	-	-	-	322	329	351	-	-	-
7,5			300	38	80	300	38	80	322	329	351	-	-	-	322	329	351	-	-	-
11,0			350	42	110	350	42	110	352	359	381	-	-	-	352	359	381	585	601	-
15,0			350	42	110	350	42	110	352	359	381	-	-	-	352	359	381	585	601	-
18,5			350	42	110	350	48	110	352	359	381	-	-	-	-	359	381	585	601	-
22,0			350	48	110	350	48	110	352	359	381	585	-	-	-	359	381	585	601	-
30,0			400	55	110	400	55	110	355	362	381	585	-	-	-	362	381	585	601	-
37,0			400	55	110	450	60	140	355	362	381	585	-	-	-	-	414	615	631	-
45,0			450	55	110	450	60	140	355	362	384	615	-	-	-	-	414	615	631	-
55,0			550	60	140	550	65	140	-	392	414	617	-	-	-	-	414	617	633	740
75,0			550	65	140	550	75	140	-	392	414	617	-	-	-	-	-	617	633	740
90,0			550	65	140	550	75	140	-	392	414	617	633	-	-	-	-	617	633	740
110,0			660	65	140	660	80	170	-	-	444	647	663	-	-	-	-	647	663	770
132,0			660	65	140	660	80	170	-	-	444	647	663	-	-	-	-	-	663	770
160,0			660	65	140	660	80	170	-	-	-	647	663	-	-	-	-	-	663	770
200,0			660	70	140	660	80	170	-	-	-	-	-	-	-	-	-	-	-	770

Flange design (standard)

Flange designs (standard)

Material variant	Maximum permissible discharge pressure	Flanges drilled to EN			Flanges drilled to ASME Class	
		Standard	Suction flange	Discharge flange	Suction flange	Discharge flange
10	-	EN 1092-2	PN 16	PN 40	125 RF	250 RF
11	-	EN 1092-2	PN 16	PN 40	125 RF	250 RF
12	-	EN 1092-2	PN 16	PN 40	125 RF	250 RF
13	-	EN 1092-2	PN 16	PN 40	125 RF	250 RF
14	-	EN 1092-2	PN 16	PN 40	125 RF	250 RF
15	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
16	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
17	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
20	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
21	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
22	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
23	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
25	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
26	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
27	-	EN 1092-1	PN 25	PN 100 ⁴⁴⁾	300 RF	600 RF
28 ⁴⁴⁾	-	EN 1092-1	PN 40	PN 100	300 RF	600 RF
30	-	EN 1092-1	PN 25	PN 63	300 RF	600 RF ⁴³⁾
31 (RO)/33 (RO)	63 bar	EN 1092-1	PN 25	PN 63	300 RF	600 RF
	80 bar/100 bar	EN 1092-1	PN 25	PN 100 ⁴⁴⁾		

⁴²⁾ Depending on the make

⁴³⁾ For size 32: discharge flange DN 1¼" can also be supplied as DN 1½" on request.

⁴⁴⁾ For Multitec 100 and 125 only

Nozzle positions

The nozzle position is variable. The required nozzle position has to be selected when completing an order in the selection program.

i For all pump sizes and material variants nozzle position 0-0 (or illustration 2 for vertical installations) is only available for versions with 3 or more stages. An exception is DN 150 in

material variants 10, 11, 12, 13 and 14, for which nozzle position 0-0 is available for versions with 2 or more stages. The nozzle position is generally defined seen from the drive.

Horizontal installation (A, B, C, D, E and F)


The first letter defines the suction nozzle, the second letter the discharge nozzle.

A - axial suction nozzle

0 - suction and/or discharge nozzle on top

R - suction and/or discharge nozzle on the right

L - suction and/or discharge nozzle on the left

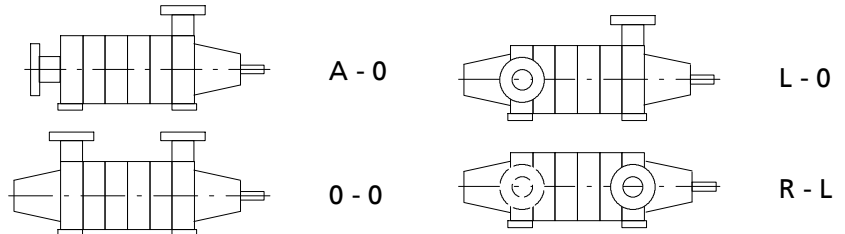

Vertical installation


The suction nozzle (at the bottom) serves as a fixed point. The illustration number indicates the offset position of the discharge nozzle compared to the suction nozzle.

1 - offset by 180°


2 - aligned

3 - 90° offset to the left

4 - 90° offset to the right

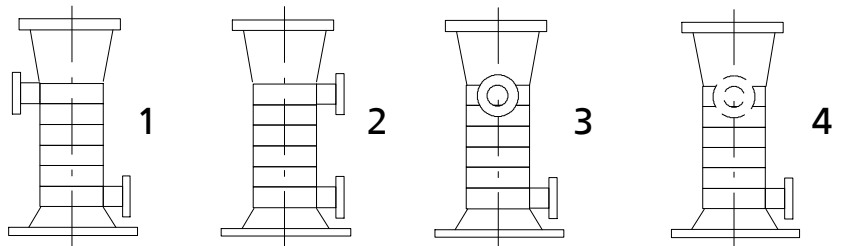

General assembly drawing with list of components (example)

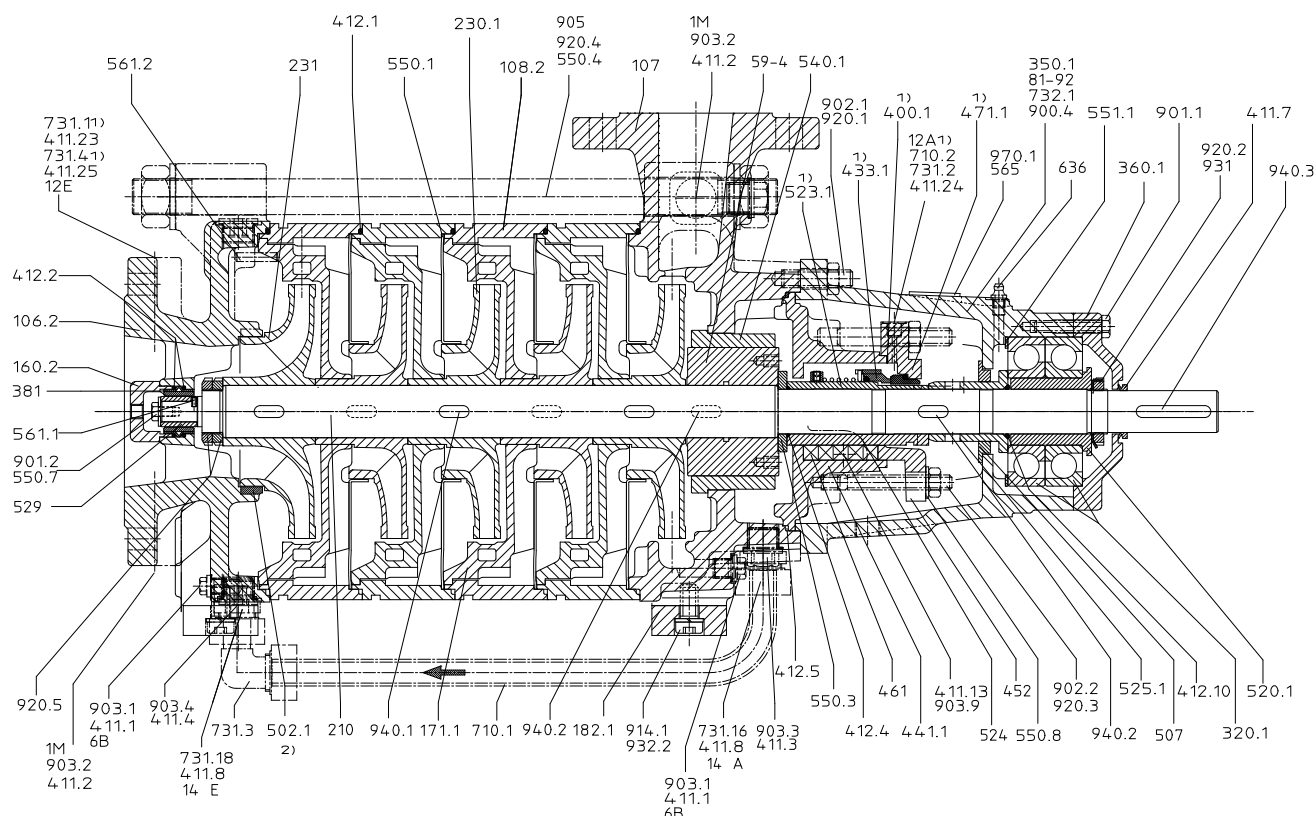

Multitec, installation type A, size 65-100

List of components

List of components

Part No.	Part description	Part No.	Part description
106.2	Suction casing	525.1	Spacer sleeve
107	Discharge casing	529	Bearing sleeve SiC
108.2	Stage casing	540.1	Bush
160.2	Cover	550.1	Sheet metal disc
171.1	Diffuser	550.3/4/7/8	Disc
182.1	Foot	551.1	Spacer disc
210	Shaft	561.1/2	Grooved pin
230.1	Impeller	565	Rivet
231	Suction stage impeller	59-4	Balance drum
320.1	Rolling element bearing	636	Lubricating nipple
350.1	Bearing housing	710.1/2	Pipe
360.1	Bearing cover	731.1/2/3/4/16/18	Pipe union
381	Bearing cartridge	732.1	Bracket
400.1	Gasket	81-92	Cover plate
411.1/2/3/4/7/8/13/23/24/25	Joint ring	900.4	Screw
412.1/2/4/5/10	O-ring	901.1/2	Hexagon head bolt
433.1	Mechanical seal	902.1/2	Stud
441.1	Shaft seal housing	903.1/2/3/4/9	Screw plug
452	Gland follower	905	Tie bolt
461	Gland packing	914.1	Hexagon socket head cap screw
471.1	Seal cover	920.1/2/3/4/5	Nut
502.1	Casing wear ring	931	Lock washer
507	Thrower	932.2	Circlip
520.1	Sleeve	940.1/2/3	Key
523.1	Shaft sleeve	970.1	Label/plate
524	Shaft protecting sleeve		



LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289