

Specification Sheet

Pump Data

Model *	SLP-160-5	
Liquid	Seawater, Brackish water, Fresh Water	
Pump Operating Ambient Temp	33 - 158 °F	0.6 - 70.0 °C
Maximum Storage Temp	185 °F	85.0 °C
Pump Operating Flow Range **	282 - 1057 gpm	64 - 243.1 m³/h
Maximum Rated Flange Pressure	270 psi	19 bar
Maximum Solid Size	0.125 in	3.175 mm
Head (nominal)	167 Ft	50.9 M
Pump Weight (with base)	275 lbs	125 kg
Full Impeller Diameter	7.500 in	190.5 mm
PEI _{CL} Range ***	0.91-0.94	
* Subject to international patent applications		** Range includes several sizes
*** Motor Dependent		

Fittings

Pipe Joints	Flange: ASME/ANSI B16.5 Class 150 Feed Inlet 5" Feed Outlet 3", 300#
-------------	--

Lubrication

Cooling	Product fluid cooling
Lubrication	Product fluid

Testing and Inspection

Hydrostatic Test *	Standard
Mechanical Run Test *	Standard
Factory Duty Point Hydraulic	
Performance Test **	Not Available

Material Certificates

* General Code Groups, Associations, Laboratories, and Approval Bodies include the American Society for Testing and Materials (ASTM), the International Organization for Standardization (ISO), and the NSF International.

** There is no way to differentiate between the hydraulic efficiency and electric efficiency when the unit is tested as a coupled system.

Performance

Peak Efficiency **	Up to 80%
--------------------	-----------

** Range includes several sizes

Motor Data


Manufacturer	WEG or equivalent					
Motor Type	NEMA					
Ambient Temperature	-4 - 104 °F	-20 - 40 °C	-4 - 104 °F	-20 - 40 °C	-4 - 104 °F	-20 - 40 °C
Power Rating	50 HP-460/60/3	40 HP-380/50/3	30 HP-460/60/3	25 HP-380/50/3	20 HP-460/60/3	15 HP-380/50/3
Service Factor	1.25	1.00	1.25	1.00	1.25	1.15
Efficiency	93.00%	93.3%	91.70%	92.40%	91.00%	91.20%
Full Load Amps	56.1	54.9	33.8	34.2	23.2	20.4
Frame	326 JM	326 JM	286 JM	286 JM	256 JM	256 JM
Enclosure	TEFC	TEFC	TEFC	TEFC	TEFC	TEFC
Electric Power	37 kW	30 kW	22 kW	18.5 kW	15 kW	11 kW
Motor Weight	590 lbs [268 kg]	590 lbs [268 kg]	412 lbs [187 kg]	412 lbs [187 kg]	288 lbs [131 kg]	288 lbs [131 kg]

Materials

Casing	Zeron SS (ASTM A995-13 6A)
Bearings	Non-metallic
Motor Adapter	316 SS
Optional Baseplate	Carbon Steel - Painted (A36)
Mechanical Seal - Type 21	SiC/ Graphite
O-Rings	Buna N®
Impeller	Zeron SS (ASTM A995-13 6A)
Crating/Packaging	Export-Wood

Packaging/ Crating

Protective Covers	Standard	
Export Crating	Standard	
Additional Shipping Options	Available per customer request	
Pump Package Weight	865 lbs	393 kg

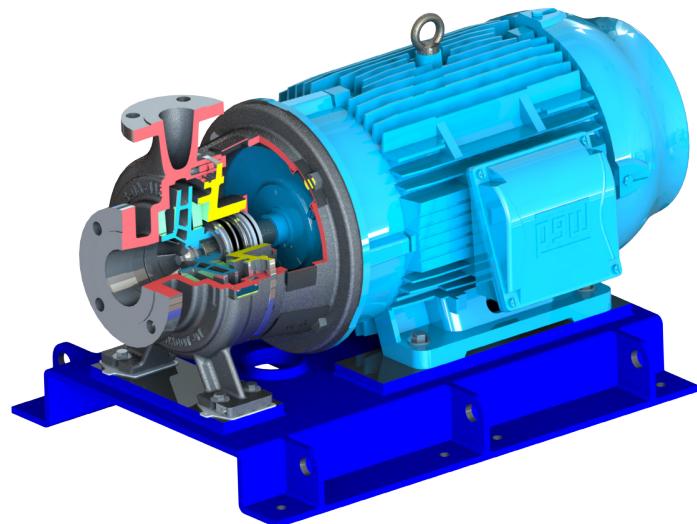

NOTE: All numeric values are based on performance norms. Specific performance data is included with each individual unit. FEDCO reserves the right to make specification changes at any time without prior notice. Please contact your FEDCO representative for information. email: sales@fedco-usa.com

The information, date and drawings in this proposal are strictly confidential and for the use of the Fluid Equipment Development Company, LLC ("FEDCO") and its intended recipient(s) only. The information is not to be disclosed or distributed to any other party(ies) without expressed prior written permission of FEDCO.